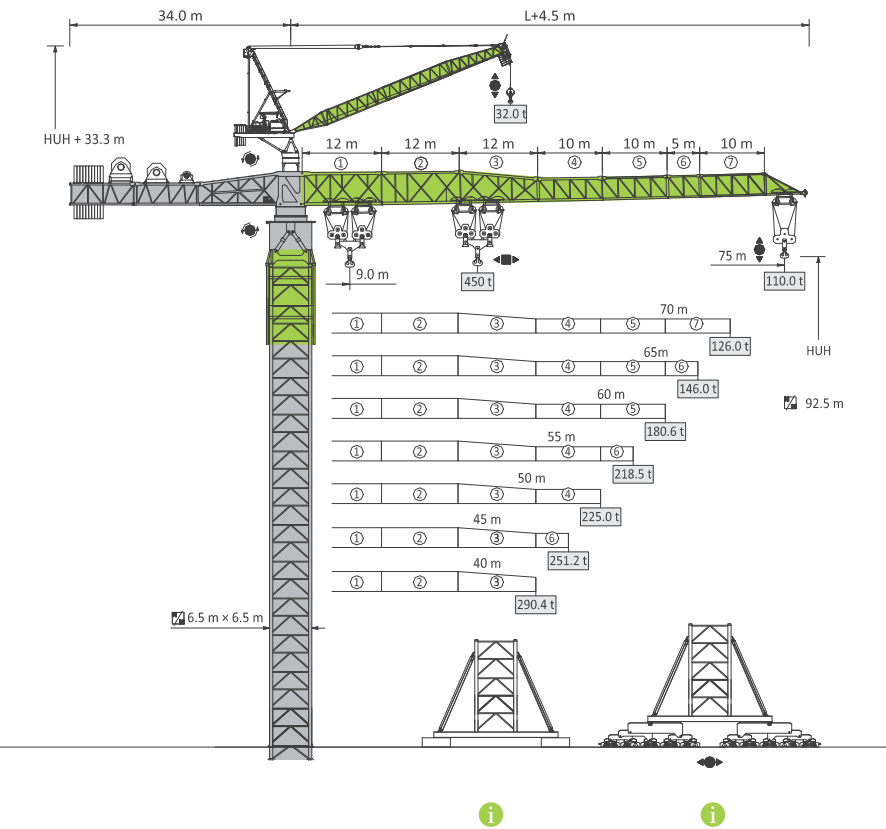
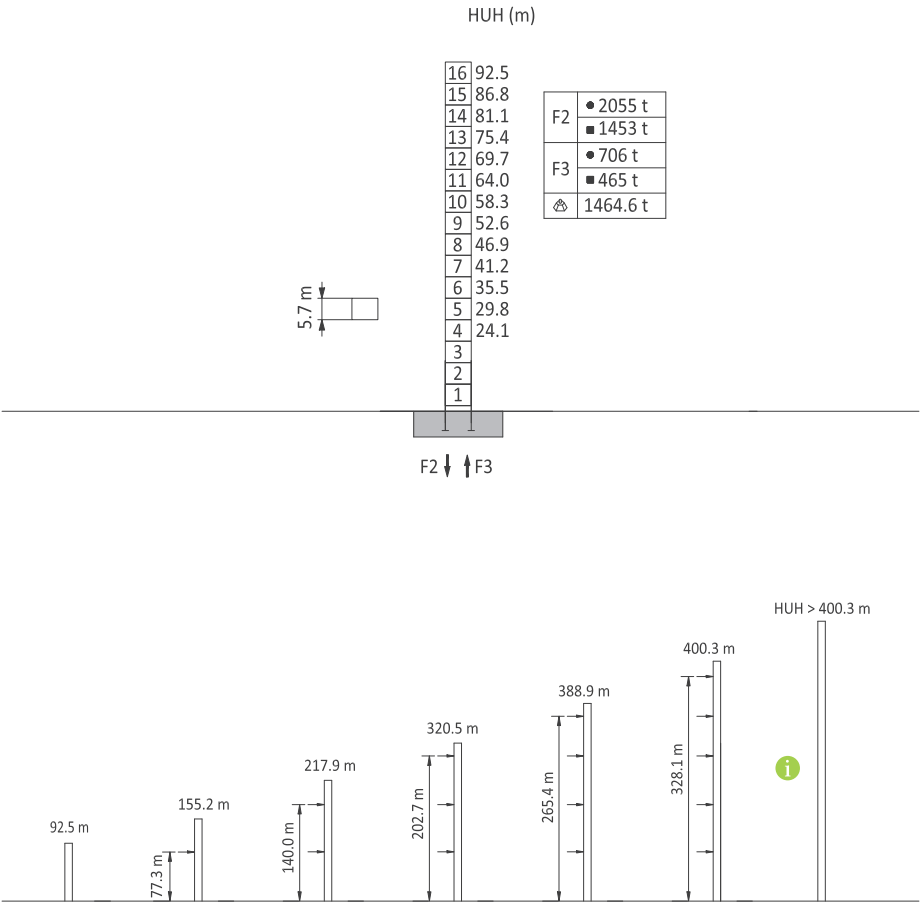


R12000-450



塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

6.5m R12000-450





Load diagrams / Lastkurven / 起重性能

		m	m / t	30.0	35.0	40.0	42.5	45.0	47.5	50.0	52.5	55.0	57.5	60.0	62.5	65.0	67.5	70.0	72.5	75.0
75.0		9.0-41.1/225.0	225	225	225	216.7	202.8	190.4	179.3	169.2	160.2	151.9	144.4	137.5	131.1	125.2	119.8	114.7	110	
		9.0-21.6/450.0	300.3	247.7	209	193.2	179.3	166.9	155.8	145.8	136.7	128.4	120.9	114	107.6	101.7	96.3	91.2	86.5	
70.0		9.0-42.9/225.0	225	225	225	212.6	199.7	188.1	177.6	168.2	159.6	151.7	144.5	137.8	131.7	126				
		9.0-22.4/450.0	315.4	260.6	220.1	203.7	189.1	176.2	164.6	154.1	144.7	136.1	128.2	121	114.3	108.2	102.5			
65.0		9.0-44.9/225.0	225	225	225	224.6	211	198.8	187.8	177.9	168.8	160.6	153	146						
		9.0-23.5/450.0	333.9	276.2	233.7	216.4	201.1	187.5	175.3	164.3	154.4	145.3	137.1	129.5	122.5					
60.0		9.0-49.6/225.0	225	225	225	225	225	225	223	210.8	199.8	189.8	180.6							
		9.0-25.8/450.0	375.4	311.4	264.3	245.1	228.1	213	199.5	187.3	176.3	166.3	157.1							
55.0		9.0-53.6/225.0	225	225	225	225	225	225	225	218.5										
		9.0-27.8/450.0	410.8	341.4	290.4	269.6	251.2	234.8	220.2	207	195									
50.0		9.0-50.0/225.0	225	225	225	225	225	225	225											
		9.0-27.8/450.0	410.8	341.5	290.4	269.6	251.2	234.9	220.2											
45.0		9.0-45.0/225.0	225	225	225	225	225													
		9.0-27.8/450.0	410.8	341.5	290.4	269.6	251.2													
40.0		9.0-40.0/225.0	225	225	225															
		9.0-27.8/450.0	410.8	341.5	290.4															

Mechanisms / Antriebe / 传动机构

10 kV									kW	
-------	--	--	--	--	--	--	--	--	----	--

平衡重 / Counter-jib ballast / Gegenauslegerballast

 m	18.0 t	10.0t	 (t)	PHZ18000	PHZ10000C
75.0	10	0	180		
70.0	9	1	172		
65.0	9	1	172		
60.0	10	0	180		
55.0	10	0	180		
50.0	9	1	172		
45.0	8	1	154		
40.0	8	0	144		
				(mm)	(mm)

压重 / Central ballast / Zentralballast






Dimensions and weight / Abmessungen und Gewicht / 运输单元

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger		12.70	2.70	3.10	20000
		12.10	2.70	2.50	16800
		10.60	2.80	3.60	29300
		10.30	2.70	3.80	24500
起重臂节 Jib section Auslegerelement		① 12.80	2.70	2.90	20000
		② 12.50	3.00	2.80	18800
		③ 12.30	2.70	2.80	20300
		④ 12.20	2.70	2.70	17900
		⑤ 12.20	2.60	2.50	13400
		⑥ 12.60	2.70	2.70	12300
		⑦ 10.50	2.70	3.80	18800
		⑧ 10.50	2.70	3.60	14400
塔头 Tower head Turmspitze		⑨ 10.34	2.70	3.60	8800
		⑩ 5.50	2.70	3.60	6300
载重小车 Trolley Laufkatze		⑪ 6.50	2.80	3.80	5800
		⑫ 6.50	2.80	3.80	5800
吊钩 Pulley block Hubflasche		⑬ 6.40	4.50	3.20	49700
		⑭ 3.74	3.42	2.95	8770
司机室 Cabin Kabine		⑮ 3.87	3.42	2.99	8840
		⑯ 3.10	0.60	3.70	2×4100
吊钩 Pulley block Hubflasche		⑰ 4.80	0.60	3.40	8200
		⑱ 3.10	1.70	2.60	9800

运输单元 / Dimensions and weight / Abmessungen und Gewicht

上装 / Slewing crane part / Drehender Kranteil			L (m)	B (m)	H (m)	kg (±5%)
起升机构 Hoisting mechanism Hubwerk		H358FL565-1600D H358FL565-1600D-b	6.10	3.60	2.85	2×52500
变幅机构 Trolleying mechanism Katzfahrwerk		T750FC75	4.00	2.30	2.30	12400

塔身 / Crane tower / Kranturm		L (m)	B (m)	H (m)	kg (±5%)
上支座 Turntable Drehrahmenoberteil		6.00	5.00	2.60	46300
下支座 Slewing support Drehrahmenunterteil	 6.5 m - S65P200	6.60	6.60	2.70	66500
	 6.5 m - S65P200	4.20	0.70	0.70	8×4000
	 6.5 m - S65P200	7.70	1.70	3.10	2×19000
引进系统 Mounting beam Einführungsträger	 6.5 m - M65P200	14.00	2.80	1.20	5600
爬升架 Climbing tower section Kletterturmstück	 6.5 m - TC65P200G	13.50	1.60	1.20	4×5400
	 6.5 m - TC65P200G	6.90	3.50	0.50	2×6000
	 6.5 m - TC65P200G	6.90	3.40	0.26	9×2000
顶升机构 Climbing mechanism Kletterwerk	 6.5 m - J65P200	6.50	2.50	0.50	2×7000
标准节 Tower section Turmstück	 6.5 m - X65G5050A	6.16	0.78	0.96	4600
	 6.5 m - X65G5050A	5.50	0.30	2.60	1200
支腿 Fixing angles Verankerungsfuss		3.70	1.00	1.00	4×3000