

ZOOMLION

ELECTRIC ARTICULATING BOOM LIFT

ZA26JE

Comply with CE/ANSI/CSA Standard



FEATURES

Standard Features

Proportional control
All motion alarm
Flashing beacon
Self-closing entry gate
Emergency descent system
Emergency stop button
Auto-leveling system
On-board diagnostic system
Over tilt protection system
Oscillating axle
Load sensing system
4.3' LED display
Horn
Anti-crushing device
Fast lowering function
Battery management system

Accessories & Options

- ▶ Platform light
- ▶ AC power to platform
- ▶ Non-marking tire
- ▶ GPS
- ▶ Platform mesh to Mid or Top rail
- ▶ Storage Tray
- ▶ White Noise Alarm



HIGHLIGHTS

- ▶ Equipped with a next-generation distributed power system, energy consumption is reduced by more than 30%. The modular design of drive components significantly improves maintenance efficiency and reduces maintenance costs
- ▶ The lithium-ion battery power system features enhanced cold-weather applicability. Equipped with a next-generation BMS, it is capable of operating in extremely cold environments as low as -30°C
- ▶ The automotive-grade electric drive components achieve IP67 protection rating. The integrated and modular design reduces wiring harnesses by 20%, lowers the risk of high-voltage shock, eliminates the risk of relay contact welding, and greatly improves reliability
- ▶ The dual load design allows the machine to carry heavier payloads and larger workpieces, reducing lifting, handling, and turnaround time
- ▶ Industry-leading working range in its class. Maximum working height reaches 28.2 m, maximum horizontal reach reaches 19.4 m / 17.6 m, and up-and-over height reaches 9.48 m

- ▶ Modular component design effectively reduces lifecycle operating costs, improves serviceability, and enhances parts commonality
- ▶ The boom system is equipped with multiple detection and protection devices, providing more reliable operation and safer performance

ZOOMLION

Model	ZA26JE
	Metric
Size	
Max Work Height	28.2m
Max Platform Height	26.2m
Max Horizontal Outreach	19.4m/17.6m
Max Up and Over Height	9.48m
A - Stowed Length	11.91m
B - Stowed Width	2.465m
C - Stowed Height	2.835m
D - Platform Length	2.44m
E - Platform Width	0.91m
F - Wheelbase	3.05m
G - Min Ground Clearance	0.40m
Rated load	250kg/360kg
Max Drive Speed	5km/h
Max Gradeability	45%(24°)
Axles Oscillation	0.2m
Turning Radius (Inside)	3.025m
Turning Radius (Outside)	6.311m
Turntable Swing	360° continuous
Platform Rotation	±90°
H-Tail Swing	1.428m
Max. Working Slope	5°
Max. Wind Speed	12.5m/s
Battery specification	80V/460Ah
Tire model	15-625 Foam-filled tires
Overall weight	18900kg

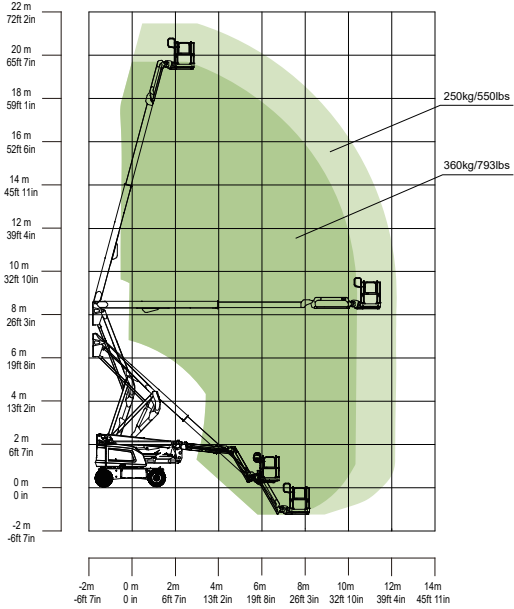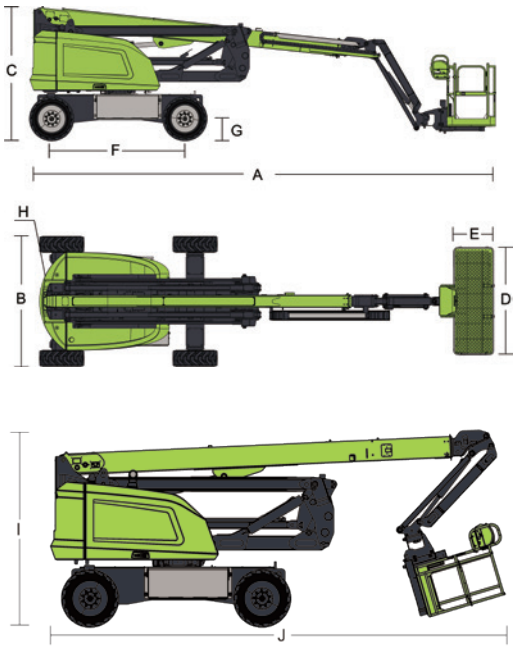

Range of Motion ZA26JE

ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353692 Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
E-mail: awp@zoomlion.com Web: www.zoomlion-access.com

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification. Product specifications are updated to May, 2026.