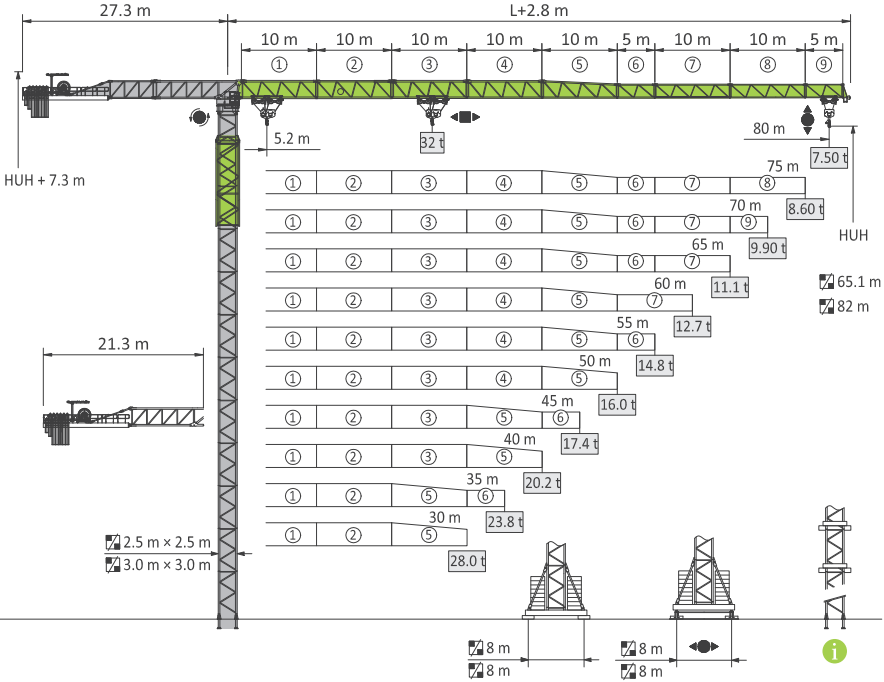
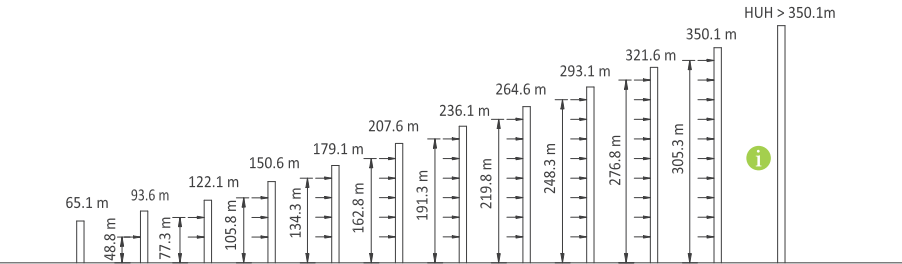
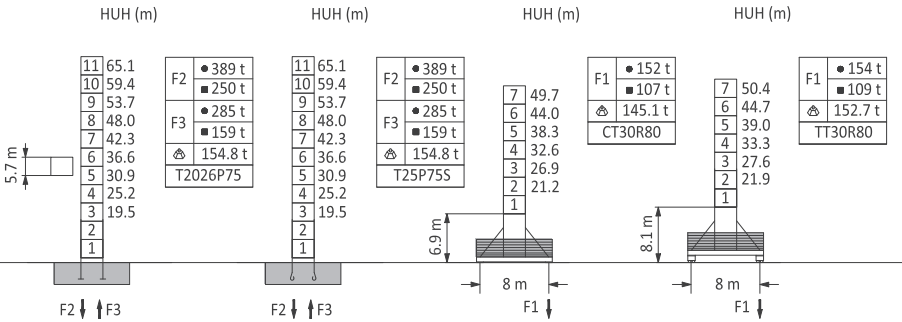


R800-32



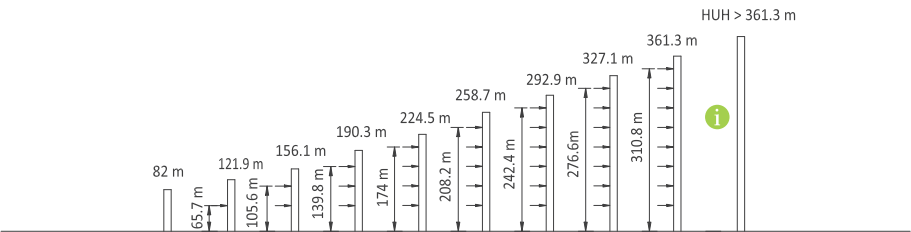
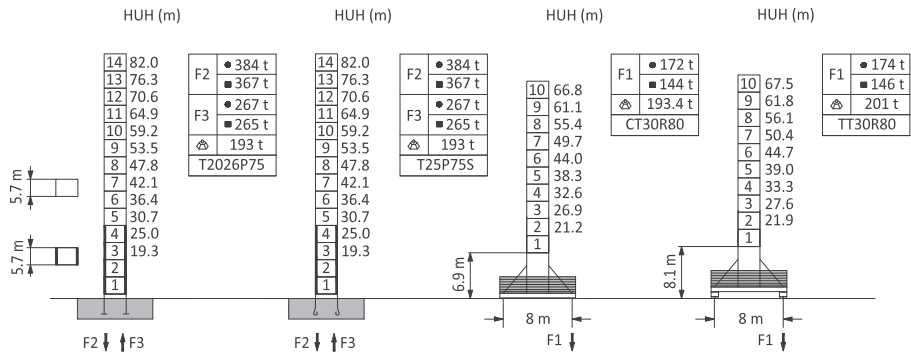
塔身—反力及附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

 2.5m – U R800-32U



Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen / 塔身-反力&附着

3.0m – UB R800-32UB



起重性能 / Load diagrams / Lastkurven



bd—Ubd

		m	m / t	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0
80.0	bd	6.3-42.4/16.0	16.00	16.00	16.00	16.00	16.00	16.00	16.00	14.93	13.20	11.81	10.65	9.67	8.84	8.13	7.50	
	Ubd	5.2-22.3/32.0	32.00	32.00	32.00	27.98	22.49	18.66	15.83	13.66	11.94	10.54	9.39	8.41	7.58	6.86	6.24	
75.0	bd	6.3-44.3/16.0	16.00	16.00	16.00	16.00	16.00	16.00	16.00	15.73	13.92	12.46	11.25	10.22	9.35	8.60		
	Ubd	5.2-23.3/32.0	32.00	32.00	32.00	29.47	23.72	19.71	16.74	14.47	12.66	11.20	9.98	8.96	8.09	7.34		
70.0	bd	6.3-46.5/16.0	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	14.70	13.16	11.89	10.81	9.90			
	Ubd	5.2-24.4/32.0	32.00	32.00	32.00	31.08	25.05	20.83	17.72	15.33	13.44	11.90	10.62	9.55	8.64			
65.0	bd	6.3-47.5/16.0	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	15.07	13.50	12.20	11.10				
	Ubd	5.2-24.9/32.0	32.00	32.00	32.00	31.86	25.69	21.38	18.19	15.75	13.81	12.24	10.93	9.84				
60.0	bd	6.3-49.1/16.0	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	15.68	14.05	12.70					
	Ubd	5.2-25.7/32.0	32.00	32.00	32.00	32.00	26.73	22.26	18.96	16.43	14.42	12.79	11.44					
55.0	bd	6.3-51.4/16.0	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	14.80					
	Ubd	5.2-26.9/32.0	32.00	32.00	32.00	32.00	28.14	23.46	20.00	17.35	15.25	13.54						
50.0	bd	6.3-50.0/16.0	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00						
	Ubd	5.2-26.3/32.0	32.00	32.00	32.00	32.00	27.44	22.87	19.49	16.89	14.84							
45.0	bd	6.3-45.0/16.0	16.00	16.00	16.00	16.00	16.00	16.00	16.00	16.00								
	Ubd	5.2-27.0/32.0	32.00	32.00	32.00	32.00	28.28	23.57	20.10	17.44								
40.0	bd	6.3-40.0/16.0	16.00	16.00	16.00	16.00	16.00	16.00	16.00									
	Ubd	5.2-27.1/32.0	32.00	32.00	32.00	32.00	28.46	23.73	20.24									
35.0	bd	6.3-35.0/16.0	16.00	16.00	16.00	16.00	16.00	16.00										
	Ubd	5.2-27.2/32.0	32.00	32.00	32.00	32.00	28.59	23.84										
30.0	bd	6.3-30.0/16.0	16.00	16.00	16.00	16.00												
	Ubd	5.2-26.8/32.0	32.00	32.00	32.00	28.04												

传动机构 / Mechanisms / Antriebe

380 V (± 10 %) 50 Hz			bd			Ubd			kW	
	H110FC80-1230b	t	4	8	16	8	16	32	110	1230 m 
		m/min	90	72	36	45	36	18		
	S110CA-180.195LB14/15(M) S110CA-180.195LB14/15	r/min	0 - 0.64						3×11	
	T110FC85-b	m/min	0 - 100						11	
	ZBK52-B ZAK52-B	m/min	0 - 25						4×5.2	
			154 kW + 4×5.2 kW							









Counter-jib ballast / Gegenauslegerballast / 平衡重





 m	 m	5.5 t	4.0 t	2.5 t	 (t)	PHZ5500D	PHZ4000K	PHZ2500P
80.0	27.3	6	0	0	33.0			
75.0		5	1	0	31.5			
70.0		5	0	1	30.0			
65.0		5	0	1	30.0			
60.0		5	0	0	27.5			
55.0		5	0	0	27.5			
50		4	0	1	24.5			
45.0	21.3	6	0	0	33.0	(mm)	(mm)	(mm)
40.0		5	1	0	31.5			
35.0		4	1	0	26.0			
30.0		4	0	1	24.5			

Central ballast / Zentralballast / 压重



运输单元 / Dimensions and weight / Abmessungen und Gewicht

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger		11.97	1.88	2.60	9900
		6.26	1.80	2.49	3200
		11.18	2.10	0.89	6500
起重臂节 Jib section Auslegersegment	 ①	10.38	1.40	2.52	6220
	 ②	10.38	1.40	2.52	6450
	 ③ ④ ⑤ ⑦ ⑧	10.52	1.40	2.52	3950
		10.39	1.40	2.50	3020
		10.33	1.40	2.47	2580
		10.27	1.40	1.93	1680
		10.25	1.40	1.88	970
	 ⑥ ⑨	5.28	1.40	1.93	1050
		5.23	1.40	1.87	420
	 ⑩	0.96	1.40	2.55	180
载重小车 Trolley Laufkatze		4.30	2.20	1.22	1030
吊钩 Pulley block Hubflasche		1.90	0.4	2.36	1110
司机室 Cabin Kabine		2.60	1.80	2.40	600
起升机构 Hoisting mechanism Hubwerk	 H110FC80-1230b	3.45	2.57	1.67	6580
变幅机构 Trolleying mechanism Katzfahwerk	 T110FC85-b	1.60	0.92	0.81	740
回转总成 Slewing assembly Drehteile		3.33	2.90	2.40	11380

塔身 / Crane tower / Kranturm			L (m)	B (m)	H (m)	kg (±5%)
过渡节 Transition section Übergangsstück		2.5 m - X25G2020RgC	4.05	3.23	3.23	4370
		3.0 m - X30G2020RgA	4.05	3.79	3.67	6400
爬升架 Climbing tower section Kletterturmstück		2.5 m - TC25P80	11.43	3.40	3.23	5890
		3.0 m - TC30P80U	11.46 11.46	3.79 3.79	1.87 2.16	4000 5200
标准节 Tower section Turmstück		2.5 m - X25G2026	6.00	0.43	0.49	1100
		2.5 m - X25G2026Ra	6.00	0.43	0.49	1100
		3.0 m - X30G2020	6.00	0.43	0.49	930
		3.0 m - X30G2026	6.00	0.43	0.49	1100
		3.0 m - X30G2026Ra	6.00	0.43	0.49	1100
支腿 Fixing angles Verankerungsfuss		T2026P75	1.94	0.5	0.50	4×520
		T25P75S	0.67	0.64	0.64	4×320
底架基础节 Basic mast unit Grundmasteinheit		CT25R80S/TT25R80S	6.00	2.50	2.50	6680
		CT30R80/TT30R80	6.00	3.00	3.00	7480
拉杆 Tie bar Abzugstange		CT25R80S/TT25R80S	7.13	0.14	0.17	4×260
		CT30R80/TT30R80	7.13	0.14	0.17	4×260
撑杆 Border support Randträger		CT25R80S/TT25R80S	6.74	0.30	0.38	4×910
		CT30R80/TT30R80	6.44	0.34	0.51	4×1510
整梁 Main beam Kreuzrahmer langer Arm		CT25R80S/TT25R80S	11.98	1.26	1.30	4020
		CT30R80/TT30R80	11.98	1.46	1.47	5580
半梁 Half beam Kreuzrahmer kurzer Arm		CT25R80S/TT25R80S	5.78	0.88	1.32	2×2010
		CT30R80/TT30R80	5.72	0.87	1.43	2×2690

