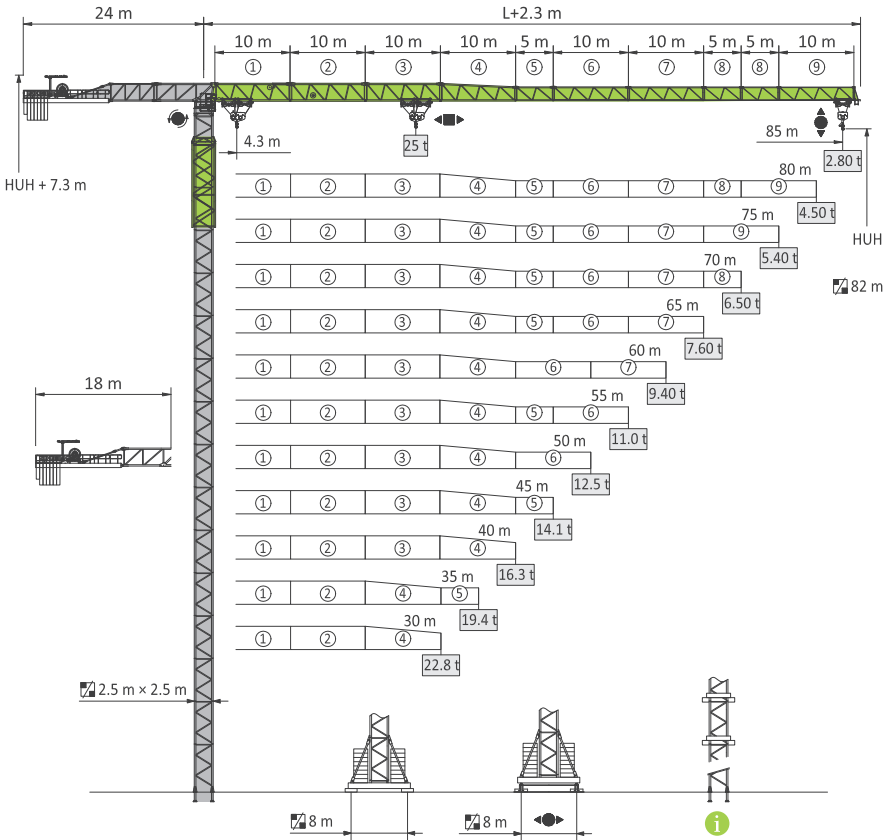


R600-25










Load diagrams / Lastkurven / 起重性能







b_d—b_{bd}

Spannweite m		m / t	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0	85.0
85.0	b _d	4.3-27.0/12.5	12.50	12.50	12.50	11.05	9.18	7.79	6.73	5.88	5.20	4.63	4.15	3.74	3.38	3.07	2.80
	b _{bd}	4.3-14.4/25.0	23.86	16.72	12.61	9.95	8.08	6.70	5.63	4.79	4.10	3.53	3.05	2.64	2.28	1.98	1.70
80.0	b _d	4.3-35.1/12.5	12.50	12.50	12.50	12.50	12.50	10.71	9.31	8.19	7.29	6.54	5.91	5.37	4.91	4.50	
	b _{bd}	4.3-18.5/25.0	25.00	22.78	17.38	13.88	11.43	9.61	8.21	7.10	6.19	5.44	4.81	4.27	3.81	3.40	
75.0	b _d	4.3-37.7/12.5	12.50	12.50	12.50	12.50	12.50	11.65	10.14	8.94	7.97	7.16	6.48	5.90	5.40		
	b _{bd}	4.3-19.8/25.0	25.00	24.74	18.93	15.16	12.51	10.55	9.04	7.85	6.87	6.07	5.39	4.80	4.30		
70.0	b _d	4.3-40.6/12.5	12.50	12.50	12.50	12.50	12.50	12.50	11.08	9.79	8.74	7.86	7.13	6.50			
	b _{bd}	4.3-21.3/25.0	25.00	25.00	20.67	16.59	13.73	11.62	9.99	8.69	7.64	6.77	6.03	5.40			
65.0	b _d	4.3-42.7/12.5	12.50	12.50	12.50	12.50	12.50	12.50	11.77	10.41	9.30	8.38	7.60				
	b _{bd}	4.3-22.4/25.0	25.00	25.00	21.95	17.65	14.63	12.39	10.67	9.31	8.20	7.28	6.50				
60.0	b _d	4.3-47.0/12.5	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50	11.64	10.42	9.40				
	b _{bd}	4.3-24.6/25.0	25.00	25.00	24.50	19.75	16.42	13.95	12.05	10.54	9.32	8.30					
55.0	b _d	4.3-49.3/12.5	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.29	11.00						
	b _{bd}	4.3-25.7/25.0	25.00	25.00	25.00	20.84	17.35	14.76	12.77	11.19	9.90						
50.0	b _d	4.3-50.0/12.5	12.50	12.50	12.50	12.50	12.50	12.50	12.5	12.50							
	b _{bd}	4.3-26.1/25.0	25.00	25.00	25.00	21.21	17.66	15.03	13.01	11.40							
45.0	b _d	4.3-45.0/12.5	12.50	12.50	12.50	12.50	12.50	12.50	12.50	12.50							
	b _{bd}	4.3-27.8/25.0	25.00	25.00	25.00	22.88	19.08	16.27	14.10								
40.0	b _d	4.3-40.0/12.5	12.50	12.50	12.50	12.50	12.50	12.50									
	b _{bd}	4.3-27.9/25.0	25.00	25.00	25.00	22.93	19.12	16.30									
35.0	b _d	4.3-35.0/2.5	12.50	12.50	12.50	12.50	12.50										
	b _{bd}	4.3-28.2/25.0	25.00	25.00	25.00	23.26	19.40										
30.0	b _d	4.3-30.0/12.5	12.50	12.50	12.50	12.50											
	b _{bd}	4.3-27.7/25.0	25.00	25.00	25.00	22.80											

Mechanisms / Antriebe / 传动机构

380 V (± 10 %) 50 Hz		b _d			b _{bd}			kW		
	H90FC63-1210	t	3.0	6.25	12.5	6.0	12.5	25.0	90	1210 m 
		m/min	90	76	38	45	38	19		
	S110CA-180.235LC14/15(M) S110CA-180.235LC14/15	r/min	0 - 0.72						2×11/ 3×11	
	T110FC85-b	m/min	0 - 100						11	
	ZBK52-B ZAK52-B	m/min	0 - 25						4×5.2	
		123 kW + 4×5.2 kW/ 134 kW + 4×5.2 kW								














平衡 / Counter-jib ballast / Gegenauslegerballast

 m	 m	5.5 t	4.0 t	2.5 t	 (t)	PHZ5500D	PHZ4000K	PHZ2500P
85.0	24	5	0	0	27.5	 (mm)	 (mm)	 (mm)
80.0		4	1	1	28.5			
75.0		5	0	0	27.5			
70.0		5	0	0	27.5			
65.0		4	1	0	26.0			
60.0		4	0	1	24.5			
55.0		4	0	1	24.5			
50.0		18	6	1	0			
45.0	6		1	0	37.0			
40.0	6		0	0	33.0			
35.0	5		0	1	30.0			
30.0	5		0	0	27.5			

压重 / Central ballast / Zentralballast



Dimensions and weight / Abmessungen und Gewicht / 运输单元

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)	
平衡臂 Counter-jib Gegenausleger		8.34	1.90	2.55	6200	
		6.26	1.80	2.49	3120	
		11.63	1.90	0.89	5740	
起重臂节 Jib section Auslegerelement	 ①	10.37	1.40	2.49	5230	
		②	10.42	1.40	2.51	3880
		③	10.39	1.40	2.50	3020
		④	10.33	1.40	2.47	2580
		⑤	10.27	1.40	1.93	1680
		⑥	10.24	1.40	1.88	1260
		⑦	10.19	1.40	1.85	800
		⑧	5.28	1.40	1.93	1050
		⑨	5.22	1.40	1.87	2×480
	 ⑩	0.96	1.40	2.55	180	
载重小车 Trolley Laufkatze		4.30	2.20	1.22	1030	
吊钩 Pulley block Hubflasche		1.90	0.40	2.36	900	
司机室 Cabin Kabine		2.60	1.80	2.40	600	
起升机构 Hoisting mechanism Hubwerk	 H90FC63-1210	3.20	2.49	1.43	5200	
变幅机构 Trolleying mechanism Katzfahrwerk	 T110FC85-b	1.60	0.92	0.81	740	
回转总成 Slewing assembly Drehteile		3.05	2.61	2.15	9030	

运输单元 / Dimensions and weight / Abmessungen und Gewicht /

塔身 / Crane tower / Kranturm			L (m)	B (m)	H (m)	kg (±5%)
过渡节 Transition section Übergangsstück		 2.5 m - X25G2020RgC	4.05	3.23	3.23	4370
爬升架 Climbing tower section Kletterturmstück		 2.5 m - TC25P80	11.43	3.41	3.20	5890
标准节 Tower section Turmstück		 2.5 m - X25G2020	6.00	0.48	0.43	930
		 2.5 m - X25G2026Ra	6.00	0.48	0.43	1100
		 2.5 m - X25Z2020	6.00	2.59	2.59	5100
		 2.5 m - X25Z2026Ra	6.00	2.59	2.59	5700
支腿 Fixing angles Verankerungsfuss		T2026P75	1.94	0.50	0.50	4×520
		T25P75S	0.67	0.64	0.64	4×320
底座基础节 Basic mast unit Grundmasteinheit		CT25R80S/TT25R80S	6.00	2.50	2.50	6680
拉杆 Tie bar Abzugstange		CT25R80S/TT25R80S	7.13	0.14	0.17	4×260
撑杆 Border support Randträger		CT25R80S/TT25R80S	6.74	0.30	0.38	4×910
整梁 Main beam Hauptträger		CT25R80S/TT25R80S	11.98	1.26	1.30	4020
半梁 Half beam Kreuzrahmer kurzer Arm		CT25R80S/TT25R80S	5.78	0.88	1.32	2×2010