
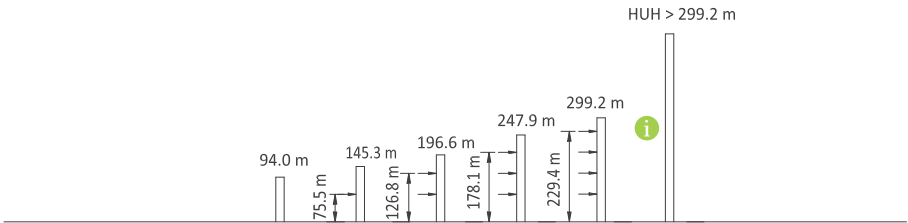




塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

4.0m – VB R2300-80VB

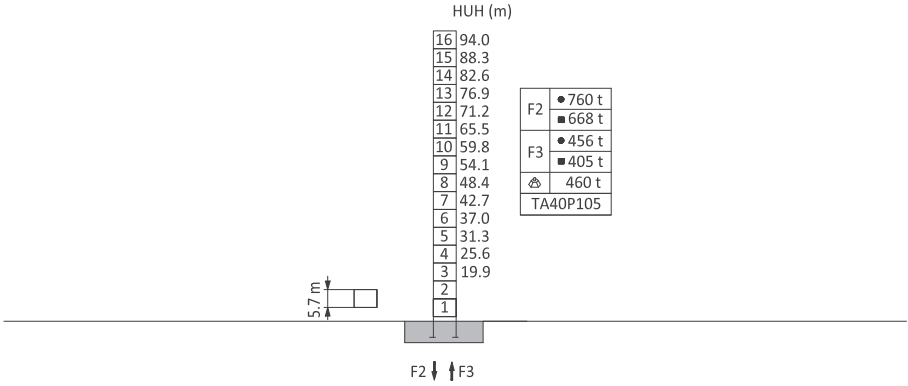

Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen / 塔身-反力&附着

4.2m – QB R2300-80QB 

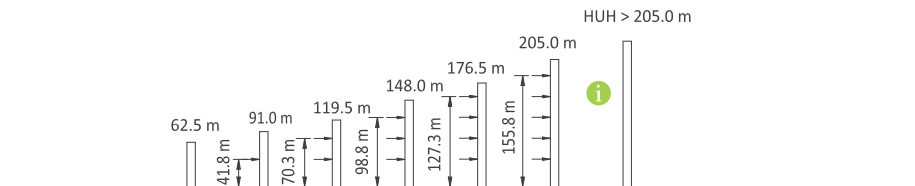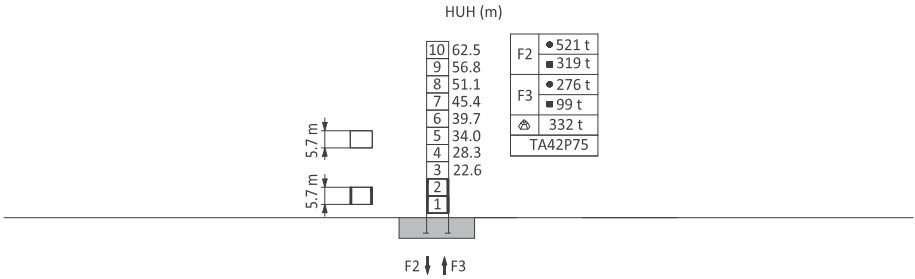







起重性能 / Load diagrams / Lastkurven






U—M

	m	m / t	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0	80.0
80	U	5.0-53.4/40.0	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	38.55	34.64	31.35	28.54	26.12	24.00
	M	5.0-29.2/80.0	80.00	80.00	80.00	77.59	64.76	55.28	47.98	42.18	37.47	33.56	30.27	27.46	25.04	22.92
75	U	5.0-54.7/40.0	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	39.76	35.75	32.37	29.49	27.00	
	M	5.0-30.0/80.0	80.00	80.00	80.00	79.86	66.70	56.96	49.47	43.52	38.68	34.67	31.30	28.41	25.92	
70	U	5.0-55.5/40.0	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	36.35	32.92	30.00	
	M	5.0-30.4/80.0	80.00	80.00	80.00	80.00	67.74	57.87	50.27	44.24	39.33	35.27	31.84	28.92		
65	U	5.0-56.2/40.0	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	36.97	33.50		
	M	5.0-30.8/80.0	80.00	80.00	80.00	80.00	68.84	58.82	51.11	44.99	40.02	35.89	32.42			
60	U	5.0-56.9/40.0	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	37.50			
	M	5.0-31.1/80.0	80.00	80.00	80.00	80.00	69.76	59.62	51.82	45.63	40.59	36.42				
55	U	5.0-55.0/40.0	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00			
	M	5.0-31.9/80.0	80.00	80.00	80.00	80.00	71.88	61.47	53.45	47.09	41.92					
50	U	5.0-50.0/40.0	40.00	40.00	40.00	40.00	40.00	40.00	40.00	40.00						
	M	5.0-31.8/80.0	80.00	80.00	80.00	80.00	71.63	61.25	53.26	46.92						
45	U	5.0-45.0/40.0	40.00	40.00	40.00	40.00	40.00	40.00	40.00							
	M	5.0-31.9/80.0	80.00	80.00	80.00	80.00	71.19	60.87	52.92							
40	U	5.0-40.0/40.0	40.00	40.00	40.00	40.00	40.00	40.00								
	M	5.0-31.9/80.0	80.00	80.00	80.00	80.00	71.25	60.92								

传动机构 / Mechanisms / Antriebe

380 V (± 10 %) 50 Hz		U				M				kW			
	H160FL200-1220D	t	3.5	10	20	40	7	20	40	80	160	1220 m 	
		m/min	88	68	40	20	44	34	20	10			
	S185CA-350.275CC20-13A x2 S185CN-350.275CC20-13A x1	r/min	0 - 0.5									3x18.5	
	T185FC87	m/min	0 - 40									18.5	
		234 kW											

Counter-jib ballast / Gegenauslegerballast / 平衡重








 m	 m	11.5 t	9.5t	 (t)	PHZ11500E	PHZ9500B
80.0	25	8	2	111.0		
75.0		7	3	109.0		
70.0		9	0	103.5		
65.0		8	1	101.5		
60.0		6	3	97.5		
55.0		8	0	92.0		
50.0		5	3	86.0		
45.0		4	3	74.5		
40.0		6	0	69.0		













Central ballast / Zentralballast / 压重













运输单元 / Dimensions and weight / Abmessungen und Gewicht

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)	
平衡臂 Counter-jib Gegenausleger		11.95	1.93	2.89	13200	
		11.30	2.00	3.08	11300	
起重臂节 jib section Auslegerelement	①	10.22	2.00	3.36	16700	
	②	11.98	2.00	3.29	15100	
	③	11.92	2.00	3.24	11200	
	④	11.93	2.00	3.17	8100	
	⑤	11.92	2.00	2.84	7300	
	⑥	10.36	2.00	2.78	4600	
	⑦	5.49	2.00	2.84	1950	
	⑧	10.50	2.00	2.30	2300	
	⑨	5.50	2.00	2.62	900	
	1.60	2.10	2.85	600		
载重小车 Trolley Laufkatze		2.60	2.35	2.61	2900	
吊钩 Pulley block Hubflasche		1.16	0.60	3.65	3000	
司机室 Cabin Kabine		2.10	1.50	2.30	800	
起升机构 Hoisting mechanism Hubwerk		H160FL200-1220D	5.09	3.34	2.45	18800
变幅机构 Trolleying mechanism Katzfahrwerk		T185FC87	2.44	1.18	1.25	2900

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
扒杆 Derrick Derrick		2.98	1.16	2.85	1200
回转总成 Slewing assembly Drehteile	  4.2 m - S42P75	4.23	3.30	3.27	30600
上支座总成 Upper support Drehrahmenoberteil	  4.0 m - S2300	3.56	4.40	2.28	15900
下支座总成 Slewing support Drehrahmenunterteil	  4.0 m - S40P105	4.04	4.04	1.86	20750

塔身 / Crane tower / Kranturm		L (m)	B (m)	H (m)	kg (±5%)
过渡梁 Transition section Übergangsträger	  4.2 m - S42P75	6.00	4.28	5.16	8654
		5.22	0.60	1.32	2×1910
	  4.0 m - X40Rg	6.17	1.04	0.55	4×2539
		4.94	0.38	0.91	2×1646
	  4.0 m - X40Rg	3.42 4.04 2.31	0.17 0.20 0.20	0.16 0.20 0.20	12×135 6×266 4×158.5
爬升架 Climbing tower section Kletterturmstück	  4.2 m - TC42P90L	13.30	2.86	2.87	4×5980
	  4.2 m - TC42P90L	14.10	3.04	2.87	4×5785

运输单元 / Dimensions and weight / Abmessungen und Gewicht

塔身 / Crane tower / Kranturm		L (m)	B (m)	H (m)	kg (±5%)
引进梁 Mounting beam Einführungsträger	 4.2 m - M42P75	8.77	1.19	2.98	3200
	 4.0 m - W40P105L	9.74	1.74	3.29	5800
标准节 Tower section Turmstück	 4.2 m - X42D/X42RbA	6.00	0.51	0.44	4x1200
	 4.2 m - X42D 4.2 m - X42D	1.61 1.72	0.17 0.15	0.25 0.15	8x200 8x100
基础/加强节 Tower section Turmstück	 4.2 m - X42RaA/X42RbA	6.00	0.51	0.44	4x1360
	 4.2 m - X42RaA/X42RbA 4.2 m - X42RaA/X42RbA	1.61 1.72	0.17 0.15	0.25 0.15	8x200 8x100
标准节 Tower section Turmstück	 4.0 m - X40A	6.17	0.66	0.56	4x2197
	 3.26	3.26	0.16	0.18	8x135
	 3.76	3.76	0.26	0.20	8x266
支腿 Fixing angles Fundamentanker	 4.2 m - TA42P75	2.34	0.60	0.60	4x700
	 4.0 m - TA40P105	2.57	0.65	0.65	4x1132
	 1.49	1.49	1.74	0.16	8x135
	 3.18	3.18	0.20	0.20	4x247