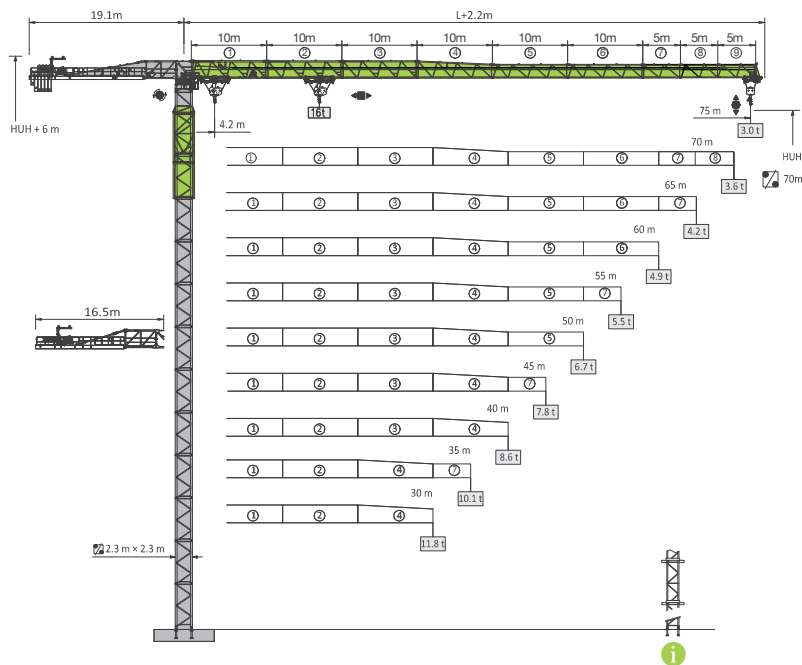


R335-16



Load diagrams / Lastkurven / 起重性能




b d — b d

		m	m / t	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0	75.0
75.0	b d	5.2-34.0/8.0	8.00	8.00	8.00	8.00	8.00	8.00	7.73	6.60	5.74	5.05	4.48	4.02	3.63	3.29	3.00
	b d	4.2-17.9/16.0	16.00	16.00	13.99	10.67	8.52	7.00	5.87	5.00	4.31	3.75	3.28	2.89	2.56	2.27	
70.0	b d	5.2-36.4/8.0	8.00	8.00	8.00	8.00	8.00	8.00	8.00	7.15	6.22	5.48	4.88	4.38	3.96	3.60	
	b d	4.2-19.1/16.0	16.00	16.00	15.13	11.57	9.26	7.63	6.42	5.49	4.75	4.15	3.65	3.23	2.87		
65.0	b d	5.2-38.1/8.0	8.00	8.00	8.00	8.00	8.00	8.00	8.00	7.55	6.57	5.80	5.17	4.64	4.20		
	b d	4.2-19.9/16.0	16.00	16.00	15.95	12.22	9.79	8.08	6.82	5.84	5.06	4.43	3.91	3.47			
60.0	b d	5.2-39.7/8.0	8.00	8.00	8.00	8.00	8.00	8.00	8.00	7.94	6.92	6.11	5.45	4.90			
	b d	4.2-20.8/16.0	16.00	16.00	16.00	12.86	10.32	8.53	7.21	6.19	5.37	4.71	4.17				
55.0	b d	5.2-40.1/8.0	8.00	8.00	8.00	8.00	8.00	8.00	8.00	8.00	6.98	6.17	5.50				
	b d	4.2-21.0/16.0	16.00	16.00	16.00	12.98	10.42	8.62	7.28	6.25	5.43	4.77					
50.0	b d	5.2-43.0/8.0	8.00	8.00	8.00	8.00	8.00	8.00	8.00	8.00	7.58	6.70					
	b d	4.2-22.4/16.0	16.00	16.00	16.00	14.07	11.32	9.39	7.95	6.85	5.97						
45.0	b d	5.2-44.0/8.0	8.00	8.00	8.00	8.00	8.00	8.00	8.00	8.00	7.80						
	b d	4.2-23.0/16.0	16.00	16.00	16.00	14.48	11.66	9.67	8.20	7.07							
40.0	b d	5.2-40.0/8.0	8.00	8.00	8.00	8.00	8.00	8.00	8.00								
	b d	4.2-23.8/16.0	16.00	16.00	16.00	15.08	12.15	10.09	8.57								
35.0	b d	5.2-35.0/8.0	8.00	8.00	8.00	8.00	8.00	8.00	8.00								
	b d	4.2-23.7/16.0	16.00	16.00	16.00	15.04	12.12	10.07									
30.0	b d	5.2-30.0/8.0	8.00	8.00	8.00	8.00	8.00										
	b d	4.2-23.1/16.0	16.00	16.00	16.00	14.61	11.77										

Mechanisms / Antriebe / 传动机构

380 V (± 10 %) 50 Hz			b d			b d			kW	
	H55FC40-880-b	t	2	4	8	4	8	16	55	880 m
		m/min	90	72	36	45	36	18		
	S75CA-130LB14/12A S75CA-130LB14/12A(M)	r/min	0 - 0.8						2×7.5	
	T75FC80-b(D)	m/min	0 - 88						7.5	
			77.5 kW							





平衡重 / Counter-jib ballast / Gegenauslegerballast

 m	 m	3.9 t	3.0 t	2.0 t	 (t)	PHZ3900A	PHZ3000S	PHZ2000R
75.0	19.1	5	1	1	22.5			
70.0		5	0	1	21.5			
65.0		4	1	1	20.6			
60.0		5	0	0	19.5			
55.0		4	1	0	18.6			
50.0	16.5	5	1	0	22.5	(mm)	(mm)	(mm)
45.0		4	1	1	20.6			
40.0		4	1	1	20.6			
35.0		3	1	1	16.7			
30.0		4	0	0	15.6			






压重 / Central ballast / Zentralballast



Dimensions and weight / Abmessungen und Gewicht / 运输单元

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger		6.83	1.64	2.51	3560
		3.8	1.71	0.63	760
		11.46	1.71	0.85	3240
起重臂节 Jib section Auslegerelement		① 10.32	1.40	2.46	2990
		② 10.27	1.40	2.39	2260
		③ 10.25	1.40	2.18	1720
		④ 10.24	1.40	2.37	1410
		⑤ 10.21	1.40	1.87	1150
		⑥ 10.21	1.40	1.85	860
		⑦ 5.20	1.40	1.85	380
		⑧ 5.21	1.40	1.84	340
		⑨ 5.21	1.40	1.84	340
		⑩ 0.97	1.40	1.84	160
载重小车 Trolley Laufkatze		2.04	1.71	1.01	680
吊钩 Pulley block Hubflasche		1.80	2.00	0.60	600
司机室 Cabin Kabine		2.08	1.30	2.16	480
起升机构 Hoisting mechanism Hubwerk	 H55FC40-880-b	2.92	1.52	1.14	2420
变幅机构 Trolleying mechanism Katzfahrwerk	 T75FC80-b(D)	1.44	0.88	0.67	420
回转总成 Slewing assembly Drehteile	 2.3 m	5.90	3.30	2.70	9600

运输单元 / Dimensions and weight / Abmessungen und Gewicht /

塔身 / Crane tower / Kranturm			L (m)	B (m)	H (m)	kg (±5%)
过渡节 Transition section Übergangsstück		2.3 m - RBRg	3.06	2.91	2.91	2440
爬升架 Climbing tower section Kletterturmstück		2.3 m - TC23P60	11.60	3.10	2.88	6920
标准节 Tower section Turmstück		2.3 m - RB	5.91	2.30	2.30	3170
		2.3 m - RBJ	5.91	2.30	2.30	3390
		2.3 m - RBJA	5.91	2.66	2.66	4150
支腿 Fixing angles Verankerungsfuss		R23P65	1.72	0.39	0.39	4×245