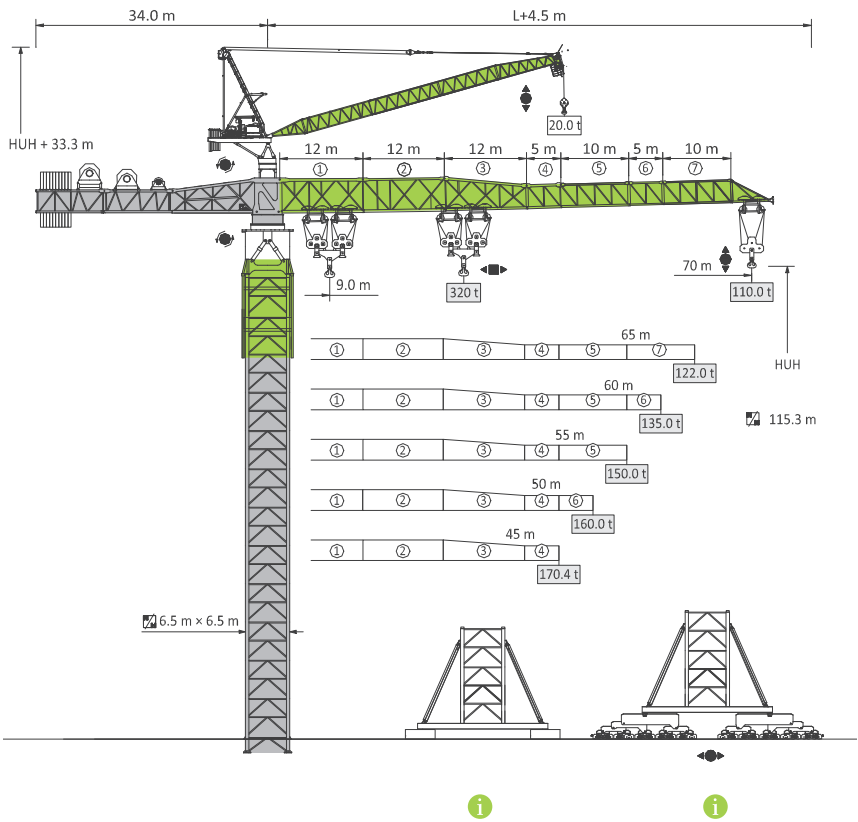
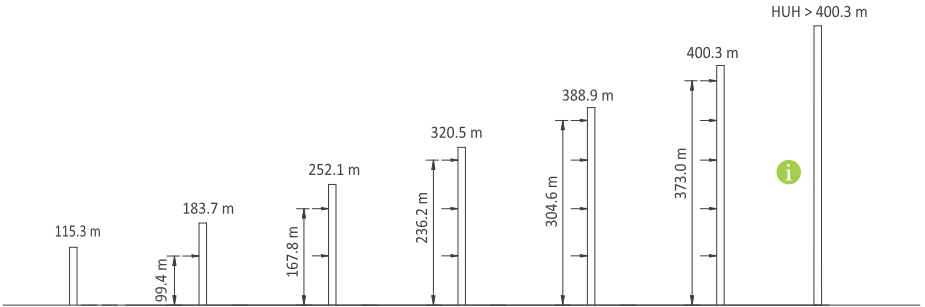
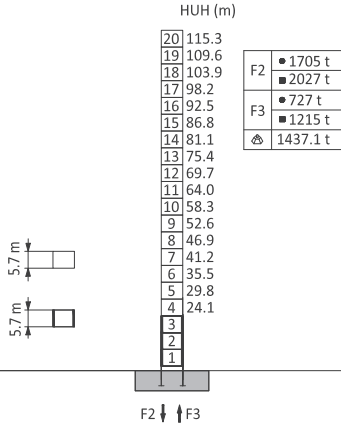


R8000-320



塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

6.5m R8000-320









Load diagrams / Lastkurven / 起重性能



吊钩—吊钩

吊钩—吊钩	m	m / t	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0	57.5	60.0	62.5	65.0	67.5	70.0		
吊钩—吊钩	70.0	9.0-51.0/160	160.0										154.7	146.5	139.1	132.2	126	120.2	114.9	110.0	
吊钩—吊钩	70.0	9.0-26.5/320	275.6	249.8	228	209.3	193	178.8	166.2	154.9	144.9	135.8	127.6	120.2	113.4	107.1	101.4	96.0	91.1		
吊钩—吊钩	65.0	9.0-51.6/160	160.0										156.9	148.6	141.1	134.2	127.8	122.0			
吊钩—吊钩	65.0	9.0-26.8/320	279.5	253.5	231.4	212.4	195.9	181.5	168.7	157.4	147.2	138	129.7	122.2	115.3	108.9	103.1				
吊钩—吊钩	60.0	9.0-51.9/160	160.0										157.9	149.5	141.9	135.0					
吊钩—吊钩	60.0	9.0-27.0/320	281.3	255.1	232.9	213.8	197.2	182.7	169.9	158.4	148.2	139.0	130.7	123.1	116.1						
吊钩—吊钩	55.0	9.0-52.0/160	160.0										158.4	150.0							
吊钩—吊钩	55.0	9.0-27.0/320	282.1	255.9	233.6	214.5	197.9	183.3	170.4	159	148.7	139.5	131.1								
吊钩—吊钩	50.0	9.0-50.0/160	160.0																		
吊钩—吊钩	50.0	9.0-27.0/320	282.1	255.9	233.6	214.5	197.9	183.3	170.4	159.0	148.7										
吊钩—吊钩	45.0	9.0-45.0/160	160.0																		
吊钩—吊钩	45.0	9.0-27.0/320	282.1	255.9	233.6	214.5	197.9	183.3	170.4												
吊钩—吊钩	40.0	9.0-40.0/160	160.0																		
吊钩—吊钩	40.0	9.0-27.0/320	282.1	255.9	233.6	214.5	197.9														

Mechanisms / Antriebe / 传动机构

10 KV		吊钩			吊钩—吊钩			kW			
	H250FL400-1800D	t	160	80	25	320	160	50	2×250	2×1800m 	
		m/min	7.5	15	30	7.5	15	30			
	S185CA-350.275CC20/13B S185CN-350.275CC20/13B	r/min	0 - 0.4						5×18.5		
	T750FC75-b	m/min	0 - 40						75		
			667.5 kW								





















平衡重 / Counter-jib ballast / Gegenauslegerballast

臂长 m	18.0 t	10.0t	吊钩 (t)	PHZ18000	PHZ10000C
70.0	10	0	180	 <p>(mm)</p>	 <p>(mm)</p>
65.0	9	1	172		
60.0	9	0	162		
55.0	8	1	154		
50.0	8	0	144		
45.0	7	0	126		
40.0	6	1	118		



压重 / Central ballast / Zentralballast















Dimensions and weight / Abmessungen und Gewicht / 运输单元

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger		12.70	2.70	3.10	20000
		12.10	2.70	2.50	16800
		10.60	2.80	3.60	29300
		10.30	2.70	3.80	24500
起重臂节 Jib section Auslegersegment	 ①	12.80	2.70	2.90	20000
	 ②	12.50	3.00	2.80	18800
	 ①	12.30	2.70	2.80	20300
	 ②	12.20	2.70	2.70	17900
	 ③	12.20	2.60	2.50	13400
	 ④	12.60	2.70	2.70	12300
	 ⑤	5.50	2.70	3.70	9900
	 ⑥	5.50	2.70	3.60	6300
塔头 Tower head Turmspitze	 ⑦	10.50	2.70	3.60	14400
	 ⑧	10.34	2.70	3.60	8800
载重小车 Trolley Laufkatze	 ⑧	6.50	2.80	3.80	5800
	 ⑨	6.40	4.50	3.20	49700
吊钩 Pulley block Hubflasche	 ⑩	3.74	3.50	3.00	7270
	 ⑪	3.75	3.50	3.00	7310
吊钩 Pulley block Hubflasche	 ⑫	3.10	0.80	3.00	2×2800
	 ⑬	4.30	1.00	3.20	5900
司机室 Cabin Kabine	⑭	3.10	1.70	2.60	9800

运输单元 / Dimensions and weight / Abmessungen und Gewicht

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
起升机构 Hoisting mechanism Hubwerk	 H250FL400-1800D H250FL400-1800D-b	6.50	3.30	3.70	2 × 32000
变幅机构 Trolleying mechanism Katzfahrwerk	 T750FC75	4.00	2.30	2.30	12400

塔身 / Crane tower / Kranturm		L (m)	B (m)	H (m)	kg (±5%)
上支座 Upper support Drehrahmenoberteil	 6.00 5.00 2.60 46300	6.00	5.00	2.60	46300
下支座 Slewing support Drehrahmenunterteil	 6.5 m - S65P200	6.60	6.60	2.70	66500
	 6.5 m - S65P200	4.20	0.70	0.70	8×4000
	 6.5 m - S65P200	7.70	1.70	3.10	2×19000
引进系统 Mounting beam Einführungsträger	 6.5 m - M65P200	14.00	2.80	1.20	5600
爬升架 Climbing tower section Kletterturmstück	 6.5 m - TC65P200G	13.50	1.60	1.20	4×5400
	 6.5 m - TC65P200G	6.90	3.50	0.50	2×6000
	 6.5 m - TC65P200G	6.90	3.40	0.26	9×2000
顶升机构 Climbing mechanism Kletterwerk	 6.5 m - J65P200	6.50	2.50	0.50	2×7000
标准节 Tower section Turmstück	 6.5 m - X65G5050A	6.16	0.78	0.96	4×4600
	 6.5 m - X65G5050A	5.50	0.30	2.60	8×1200
支腿 Fixing angles Verankerungsfuss	 3.70 1.00 1.00 4×3500	3.70	1.00	1.00	4×3500