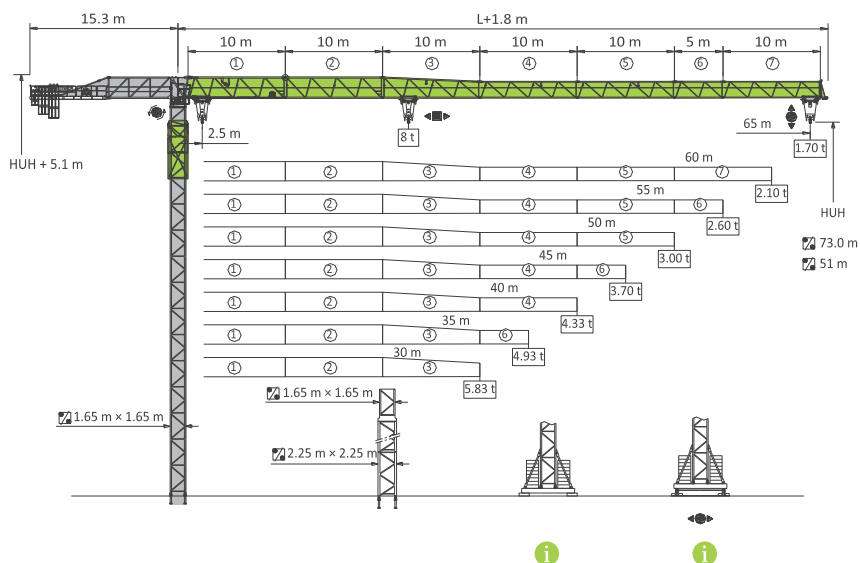
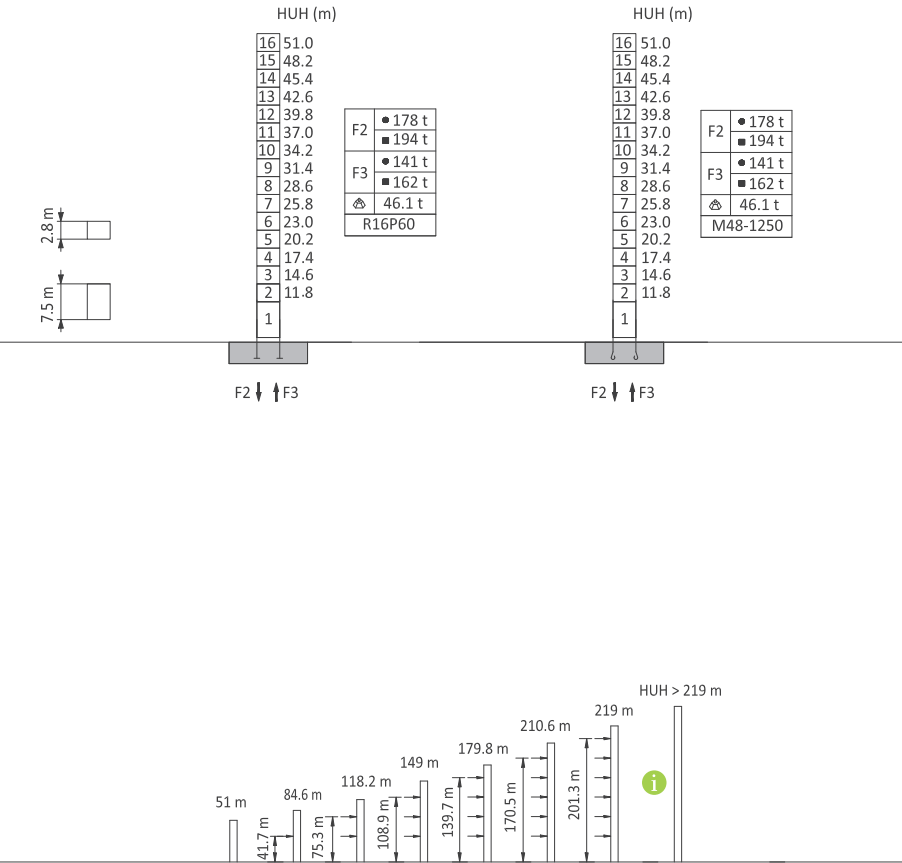


R165-8



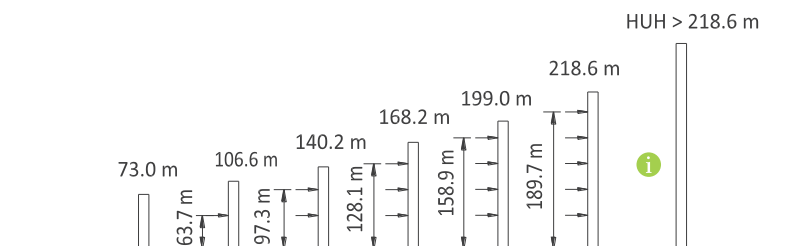
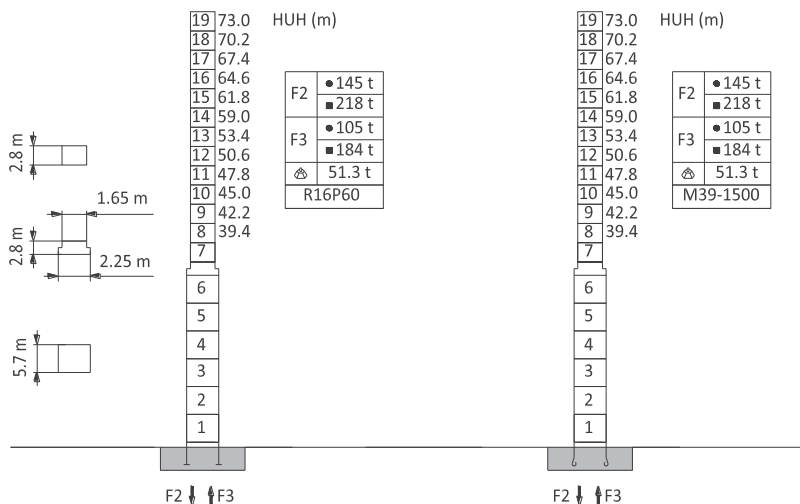
塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

 1.65m – RA R165-8RA



Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen / 塔身-反力&附着

1.65m – RA R165-8RAD



起重性能 / Load diagrams / Lastkurven




吊钩—吊钩

吊钩—吊钩	m	m / t	10.0	15.0	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0
65.0	吊钩—吊钩	2.5-33.8/4.0	4.00	4.00	4.00	4.00	4.00	3.83	3.25	2.80	2.44	2.15	1.90	1.70
	吊钩—吊钩	2.5-18.6/8.0	8.00	8.00	7.35	5.65	4.54	3.76	3.18	2.73	2.37	2.07	1.83	1.63
60.0	吊钩—吊钩	2.5-36.2/4.0	4.00	4.00	4.00	4.00	4.00	4.00	3.54	3.06	2.67	2.36	2.10	
	吊钩—吊钩	2.5-19.9/8.0	8.00	8.00	7.96	6.14	4.94	4.10	3.47	2.99	2.60	2.29	2.03	
55.0	吊钩—吊钩	2.5-39.0/4.0	4.00	4.00	4.00	4.00	4.00	4.00	3.88	3.35	2.94	2.60		
	吊钩—吊钩	2.5-21.4/8.0	8.00	8.00	8.00	6.67	5.39	4.48	3.80	3.28	2.87	2.53		
50.0	吊钩—吊钩	2.5-39.6/4.0	4.00	4.00	4.00	4.00	4.00	4.00	3.95	3.42	3.00			
	吊钩—吊钩	2.5-21.7/8.0	8.00	8.00	8.00	6.80	5.49	4.57	3.88	3.35	2.93			
45.0	吊钩—吊钩	2.5-42.2/4.0	4.00	4.00	4.00	4.00	4.00	4.00	4.00	3.70				
	吊钩—吊钩	2.5-23.1/8.0	8.00	8.00	8.00	7.31	5.91	4.93	4.19	3.63				
40.0	吊钩—吊钩	2.5-40.0/4.0	4.00	4.00	4.00	4.00	4.00	4.00	4.00					
	吊钩—吊钩	2.5-23.7/8.0	8.00	8.00	8.00	7.53	6.09	5.08	4.33					
35.0	吊钩—吊钩	2.5-35.0/4.0	4.00	4.00	4.00	4.00	4.00	4.00						
	吊钩—吊钩	2.5-23.1/8.0	8.00	8.00	8.00	7.31	5.91	4.93						
30.0	吊钩—吊钩	2.5-30.0/4.0	4.00	4.00	4.00	4.00	4.00							
	吊钩—吊钩	2.5-22.8/8.0	8.00	8.00	8.00	7.21	5.83							

传动机构 / Mechanisms / Antriebe

380 V (± 10 %) 50 Hz			吊钩		吊钩		kW	
	H30FC20-440	t	1	4	2	8	30	440 m 
		m/min	100	40	50	20		
	S110CA- 180.235LC14/15 (M)	r/min	0 - 0.8				11	
	T40FC65-b(D)	m/min	0 - 100				4.0	
			45kW					












Counter-jib ballast / Gegenauslegerballast / 平衡重

高度 m	3.0t	2.5t	1.3t	容量 (t)	PHZ3000R	PHZ2500T	PHZ1300P
65.0	2	3	3	17.4	 (mm)	 (mm)	 (mm)
60.0	2	3	2	16.1			
55.0	2	3	2	16.1			
50.0	2	3	1	14.8			
45.0	2	2	2	13.6			
40.0	1	3	2	13.1			
35.0	2	1	2	11.1			
30.0	1	2	2	10.6			









Central ballast / Zentralballast / 压重



运输单元 / Dimensions and weight / Abmessungen und Gewicht

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger		8.40	1.2	2.42	2520
		8.03	1.25	0.52	1920
起重臂节 Jib section Auslegerelement	 ①	10.26	1.15	2.38	1810
	 ②	10.24	1.15	2.36	1250
	 ③	10.22	1.15	2.32	1020
	 ④	10.17	1.15	1.88	800
	 ⑤	10.17	1.15	1.86	710
	 ⑦	10.13	1.15	1.82	500
	 ⑥	5.16	1.15	1.84	280
	 ⑧	0.87	1.15	2.10	90
载重小车 Trolley Laufkatze		2.02	1.84	0.90	290
吊钩 Pulley block Hubflasche		1.08	0.36	1.63	360
司机室 Cabin Kabine		2.08	1.30	2.25	480
起升机构 Hoisting mechanism Hubwerk	 H30FC20-440	1.77	1.00	1.05	950
变幅机构 Trolleying mechanism Katzfahrwerk	 T40FC65-b(D)	1.12	0.73	0.63	280
回转总成 Slewing assembly Drehteile	 1.65 m	2.22	2.22	2.44	2880

Dimensions and weight / Abmessungen und Gewicht / 运输单元

塔身 / Crane tower / Kranturm			L (m)	B (m)	H (m)	kg (±5%)
过渡节 Transition section Übergangsstück		1.65 m - RARg	2.97	2.18	2.22	1310
爬升架 Climbing tower section Kletterturmstück		1.65 m - TC16P60	6.64	2.33	2.14	2710
标准节 Tower section Turmstück		1.65 m - RA	2.97	1.65	1.65	1100
		1.65 m - RAJ	7.67	1.95	1.95	3180
		1.65 m - RAJZ	7.67	1.65	1.65	2920
		2.25 m - RD	2.29	2.29	5.87	2290
		2.25 m - RDG	2.29	2.29	5.87	2560
		2.25 m - RDHZ	2.29	2.29	5.87	2560
		2.25 m - RDH	5.87	2.56	2.56	2806
转换节 Tower adapter Turmadapter		RD/RA	1.35	2.36	2.36	2820
支腿 Fixing angles Verankerungsfuss		R16P60	1.50	0.36	0.36	4×170

