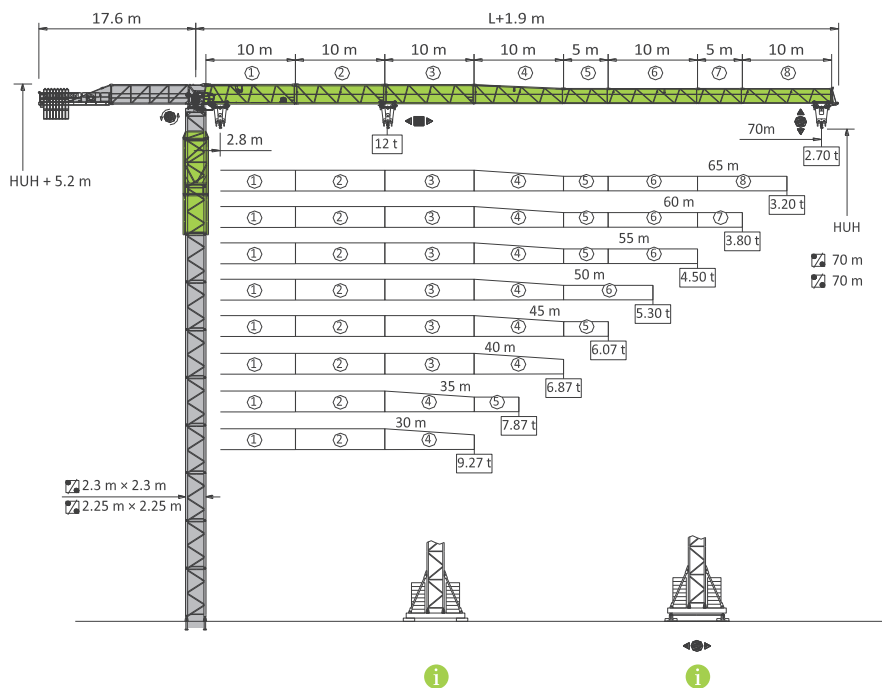
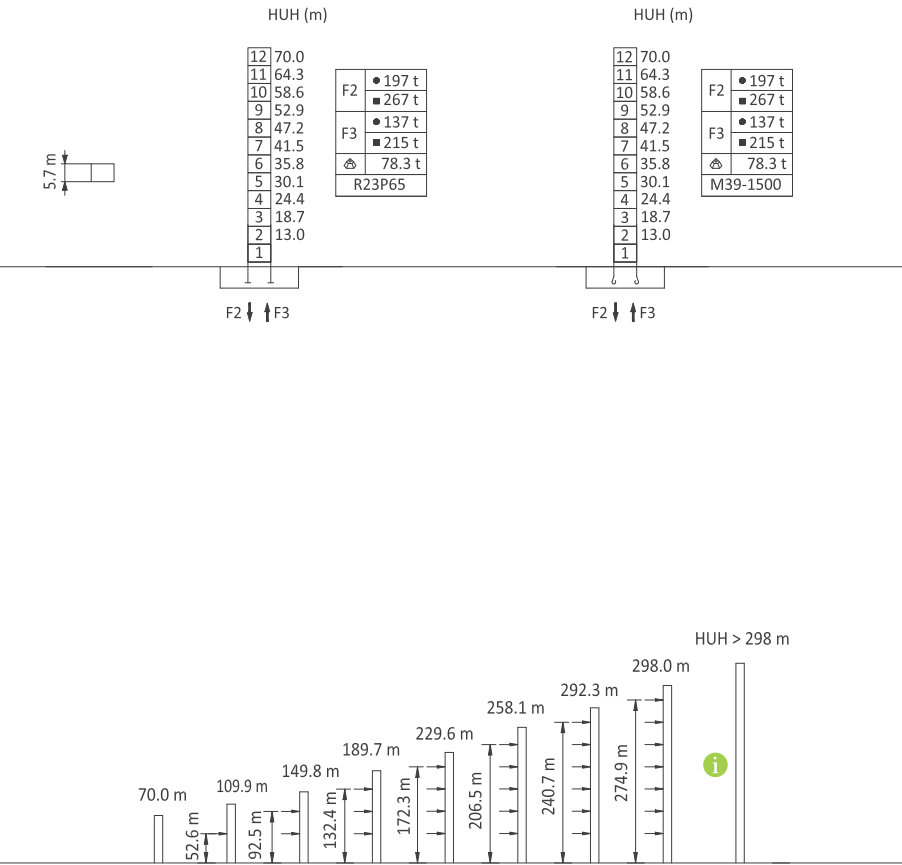


R275-12



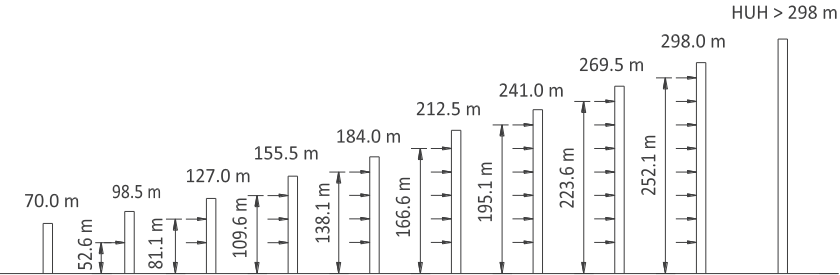
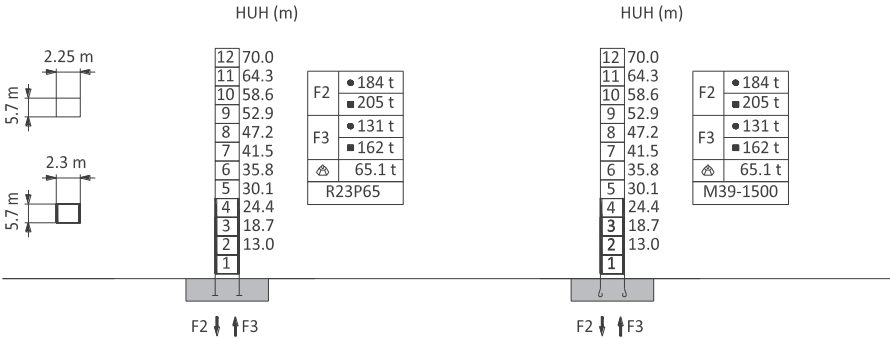
塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

2.3m – RB R275-12RB



Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen / 塔身-反力&附着

2.25m – RD R275-12RDB



起重性能 / Load diagrams / Lastkurven






 m	m / t	20.0	25.0	30.0	35.0	40.0	45.0	50.0	55.0	60.0	65.0	70.0
70.0	 2.8-37.8/6.0	6.00	6.00	6.00	6.00	5.61	4.85	4.24	3.71	3.32	2.98	2.70
	 2.8-20.8/12.0	12.00	9.66	7.78	6.46	5.47	4.71	4.11	3.61	3.21	2.86	2.57
65.0	 2.8-39.7/6.0	6.00	6.00	6.00	6.00	5.94	5.14	4.51	3.99	3.56	3.20	
	 2.8-21.8/12.0	12.00	10.21	8.24	6.84	5.81	5.01	4.38	3.86	3.43	3.07	
60.0	 2.8-41.7/6.0	6.00	6.00	6.00	6.00	6.00	5.46	4.80	4.25	3.80		
	 2.8-22.8/12.0	12.00	10.80	8.72	7.26	6.17	5.33	4.66	4.12	3.67		
55.0	 2.8-43.6/6.0	6.00	6.00	6.00	6.00	6.00	5.77	5.07	4.50			
	 2.8-23.8/12.0	12.00	11.36	9.19	7.65	6.51	5.63	4.94	4.37			
50.0	 2.8-45.2/6.0	6.00	6.00	6.00	6.00	6.00	6.00	5.30				
	 2.8-24.7/12.0	12.00	11.83	9.58	7.99	6.80	5.89	5.17				
45.0	 2.8-45.0/6.0	6.00	6.00	6.00	6.00	6.00	6.00					
	 2.8-25.3/12.0	12.00	12.00	9.84	8.21	7.00	6.07					
40.0	 2.8-40.0/6.0	6.00	6.00	6.00	6.00	6.00						
	 2.8-24.9/12.0	12.00	11.94	9.66	8.06	6.87						
35.0	 2.8-35.0/6.0	6.00	6.00	6.00	6.00							
	 2.8-24.4/12.0	12.00	11.66	9.44	7.87							
30.0	 2.8-30.0/6.0	6.00	6.00	6.00								
	 2.8-24.0/12.0	12.00	11.46	9.27								

传动机构 / Mechanisms / Antriebe

380 V (± 10 %) 50 Hz							kW	
	H45FC30-600A	t	1.5	6	3	12	45	600 m 
		m/min	95	38	47.5	19		
	S75CA-130LB12/14A S75CN-130LB12/14A	r/min	0 - 0.8				2x7.5	
	T55FC70-b(D)	m/min	0 - 75				5.5	
			65.5 kW					




Counter-jib ballast / Gegenauslegerballast / 平衡重

高度 m	3.0t	2.5t	1.3t	数量 (t)	PHZ3000R	PHZ2500T	PHZ1300P
70.0	5	2	2	22.6			
65.0	5	2	1	21.3			
60.0	5	2	1	21.3			
55.0	5	2	1	21.3			
50.0	5	1	1	18.8			
45.0	5	1	1	18.8			
40.0	5	1	0	17.5			
35.0	4	1	0	14.5			
30.0	3	1	1	12.8	(mm)	(mm)	(mm)





Central ballast / Zentralballast / 压重



运输单元 / Dimensions and weight / Abmessungen und Gewicht

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)
平衡臂 Counter-jib Gegenausleger	 ①	10.97	1.27	2.48	3500
	 ②	8.08	1.45	0.56	2170
起重臂节 Jib section Auslegerelement	①	10.32	1.15	2.45	2600
	②	10.27	1.15	2.41	1810
	③	10.23	1.15	2.38	1380
	④	10.21	1.15	2.35	1140
	⑥	10.18	1.15	1.87	810
	⑧	10.18	1.15	1.84	520
	⑤	5.18	1.15	1.89	530
	⑦	2.68	1.15	1.84	320
	⑨	0.82	1.15	2.08	90
载重小车 Trolley Laufkatze		2.10	1.87	1.04	400
吊钩 Pulley block Hubflasche		1.07	0.36	1.80	530
司机室 Cabin Kabine		2.08	1.30	2.16	480
起升机构 Hoisting mechanism Hubwerk	 H45FC30-600A	2.07	1.06	0.85	1340
变幅机构 Trolleying mechanism Katzfahrwerk	 T55FC70-b(D)	1.20	0.73	0.59	480
回转总成 Slewing assembly Drehteile		2.30	2.44	2.38	5380

Dimensions and weight / Abmessungen und Gewicht / 运输单元

塔身 / Crane tower / Kranturm			L (m)	B (m)	H (m)	kg (±5%)
过渡节 Transition section Übergangsstück		2.3 m - RBRg	3.06	2.91	2.91	2440
		2.25 m - RDRg	2.88	2.88	3.02	1790
爬升架 Climbing tower section Kletterturmstück		2.3 m - TC23P60	11.6	2.85	2.88	6920
		2.25 m - TC225P60	11.4	2.82	2.82	6180
标准节 Tower section Turmstück		2.3 m - RB	5.91	2.30	2.30	3170
		2.3 m - RBJ	5.91	2.30	2.30	3390
		2.3 m - RB-RD	5.91	2.30	2.30	3090
		2.25 m - RD	2.29	2.29	5.87	2290
		2.3 m - RBJA	5.91	2.66	2.66	4150
支腿 Fixing angles Verankerungsfuss		R23P65	1.72	0.39	0.39	4 x 245

