

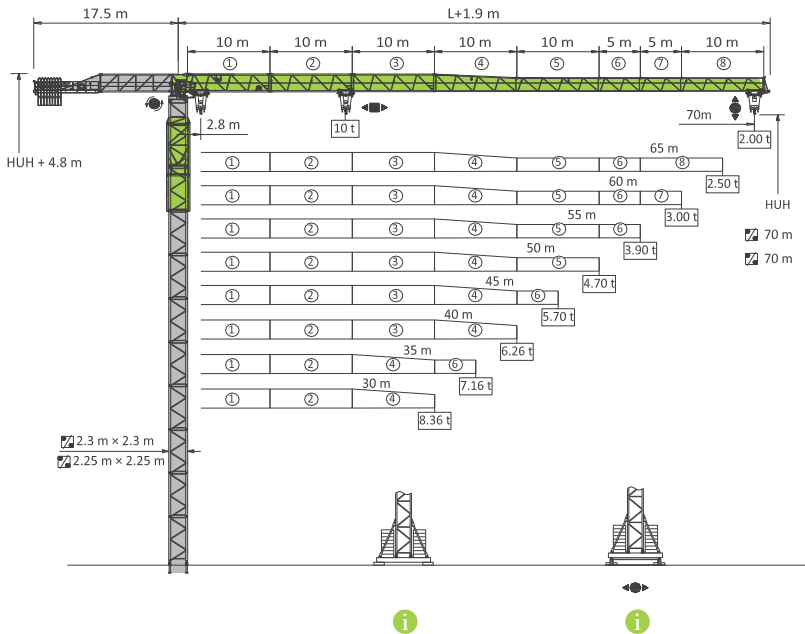


R245-10

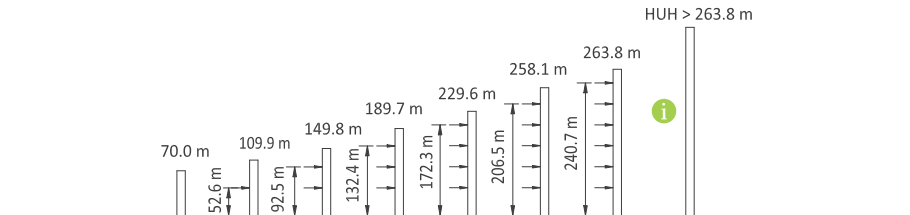



塔身—反力&附着 / Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen

2.3m – RB R245-10RB

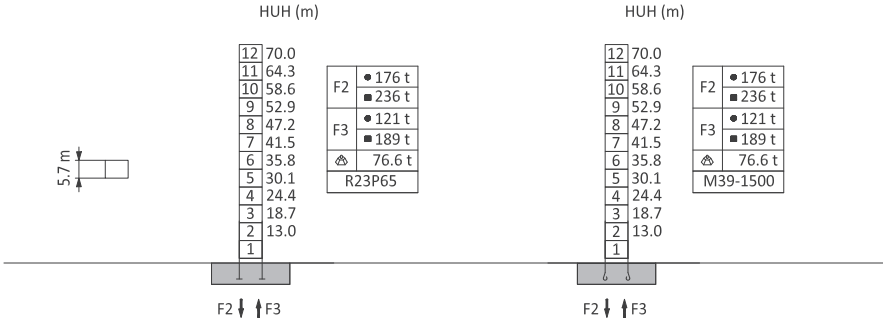

Mast – Reactions & Anchorages / Mast – Fundament Ecklasten & Verankerungen / 塔身-反力&附着

2.25m – RD R245-10RDB 

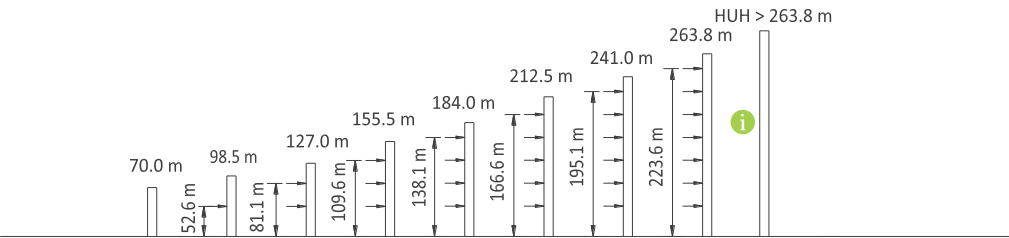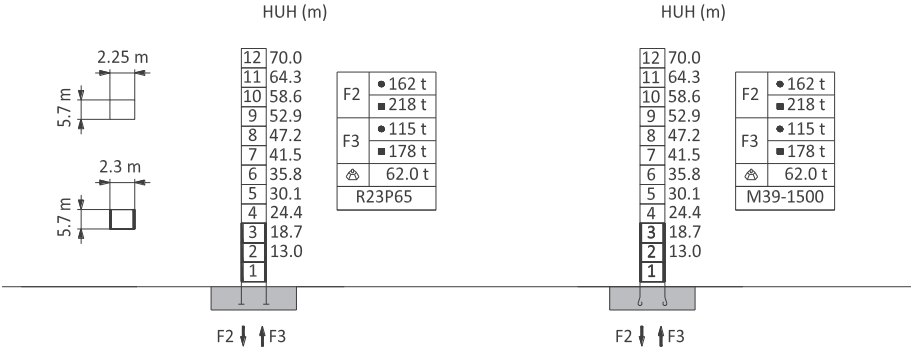

起重性能 / Load diagrams / Lastkurven






lifting height

lifting height		m / t	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5	45.0	47.5	50.0	52.5	55.0	57.5	60.0	62.5	65.0	67.5	70.0	
70.0	lifting height	2.8-35.0/5.0	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.60	4.24	3.93	3.66	3.41	3.19	2.99	2.81	2.65	2.49	2.36	2.23	2.11	2.00
	lifting height	2.8-19.3/10.0	10.00	10.00	9.57	8.34	7.36	6.57	5.92	5.37	4.90	4.49	4.14	3.83	3.55	3.30	3.08	2.88	2.70	2.54	2.39	2.25	2.12	2.00	1.89	
65.0	lifting height	2.8-38.0/5.0	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.69	4.35	4.05	3.79	3.55	3.33	3.13	2.95	2.79	2.64	2.50		
	lifting height	2.8-20.8/10.0	10.00	10.00	10.00	9.15	8.09	7.23	6.52	5.92	5.41	4.97	4.58	4.25	3.95	3.68	3.44	3.22	3.02	2.85	2.68	2.53	2.39			
60.0	lifting height	2.8-40.1/5.0	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.65	4.34	4.05	3.80	3.57	3.36	3.17	3.00				
	lifting height	2.8-22.0/10.0	10.00	10.00	10.00	9.73	8.61	7.70	6.95	6.31	5.77	5.31	4.90	4.54	4.23	3.95	3.69	3.46	3.25	3.07	2.89					
55.0	lifting height	2.8-45.0/5.0	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.68	4.39	4.13	3.90							
	lifting height	2.8-24.6/10.0	10.00	10.00	10.00	10.00	9.81	8.79	7.95	7.23	6.63	6.10	5.65	5.24	4.89	4.57	4.28	4.03	3.79							
50.0	lifting height	2.8-47.5/5.0	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	4.70									
	lifting height	2.8-26.0/10.0	10.00	10.00	10.00	10.00	10.00	9.36	8.47	7.71	7.07	6.52	6.03	5.61	5.23	4.89	4.59									
45.0	lifting height	2.8-45.0/5.0	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00									
	lifting height	2.8-27.4/10.0	10.00	10.00	10.00	10.00	10.00	9.96	9.02	8.22	7.54	6.95	6.44	5.99	5.59											
40.0	lifting height	2.8-40.0/5.0	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00													
	lifting height	2.8-26.9/10.0	10.00	10.00	10.00	10.00	10.00	9.74	8.82	8.03	7.37	6.79	6.29													
35.0	lifting height	2.8-35.0/5.0	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00																
	lifting height	2.8-26.3/10.0	10.00	10.00	10.00	10.00	10.00	9.52	8.61	7.84	7.19															
30.0	lifting height	2.8-30.0/5.0	5.00	5.00	5.00	5.00	5.00	5.00																		
	lifting height	2.8-25.8/10.0	10.00	10.00	10.00	10.00	10.00	9.28	8.39																	

传动机构 / Mechanisms / Antriebe

380 V (± 10 %) 50 Hz			lifting height		lifting height		kW			
	H37FC25-530B	t	1.25	5	2.5	10	37	530 m		
		m/min	95	38	47.5	19				
	S75CA-130LB12/14A S75CN-130LB12/14A	r/min	0 - 0.8				2x7.5			
	T55FC70-b(D)	m/min	0 - 75				5.5			
			57.5kW							












Counter-jib ballast / Gegenauslegerballast / 平衡重

 m	3.0t	2.5t	1.3t	 (t)	PHZ3000R	PHZ2500T	PHZ1300P
70.0	2	4	2	18.6	 <p>(mm)</p>	 <p>(mm)</p>	 <p>(mm)</p>
65.0	2	4	1	17.3			
60.0	2	4	1	17.3			
55.0	2	4	1	17.3			
50.0	2	3	2	16.1			
45.0	2	3	2	16.1			
40.0	2	3	1	14.8			
35.0	2	2	1	12.3			
30.0	2	2	0	11.0			






Central ballast / Zentralballast / 压重



运输单元 / Dimensions and weight / Abmessungen und Gewicht

上装 / Slewing crane part / Drehender Kranteil		L (m)	B (m)	H (m)	kg (±5%)	
平衡臂 Counter-jib Gegenausleger	 ①	11.0	1.27	2.49	3500	
	 ②	8.08	1.45	0.56	1920	
起重臂节 Jib section Auslegerelement	 ① ② ③ ④ ⑤ ⑥	10.32	1.15	2.45	2080	
		10.27	1.15	2.41	1440	
		10.23	1.15	2.38	1170	
		10.21	1.15	2.35	1020	
		10.18	1.15	1.87	890	
		10.18	1.15	1.84	500	
	 ⑦	5.18	1.15	1.89	370	
		5.18	1.15	1.84	300	
	 ⑧	0.82	1.15	2.08	90	
载重小车 Trolley Laufkatze	 ⑨	2.10	1.87	1.04	400	
吊钩 Pulley block Hubflasche	 ⑩	1.07	0.36	1.80	400	
司机室 Cabin Kabine	 ⑪	2.08	1.30	2.16	480	
起升机构 Hoisting mechanism Hubwerk	 ⑫	H37FC25-530B	1.95	1.06	0.88	1570
变幅机构 Trolleying mechanism Katzfahrwerk	 ⑬	T55FC70-b(D)	1.20	0.73	0.59	480
回转总成 Slewing assembly Drehteile	 ⑭	<input checked="" type="checkbox"/> 2.3m	2.30	2.44	2.38	5380
		<input checked="" type="checkbox"/> 2.25m	2.30	2.44	2.38	5080

Dimensions and weight / Abmessungen und Gewicht / 运输单元

塔身 / Crane tower / Kranturm			L (m)	B (m)	H (m)	kg (±5%)
过渡节 Transition section Übergangsstück		<input checked="" type="checkbox"/> 2.3 m - RBRg	3.06	2.91	2.91	2440
		<input checked="" type="checkbox"/> 2.25 m - RDRg	2.88	2.88	3.02	1790
爬升架 Climbing tower section Kletterturmstück		<input checked="" type="checkbox"/> 2.3 m - TC23P60	11.6	2.85	2.88	6920
		<input checked="" type="checkbox"/> 2.25 m - TC225P60	11.4	2.82	2.82	6180
标准节 Tower section Turmstück		<input checked="" type="checkbox"/> 2.3 m - RB	5.91	2.30	2.30	3170
		<input checked="" type="checkbox"/> 2.3 m - RBJ	5.91	2.30	2.30	3390
		<input checked="" type="checkbox"/> 2.3 m - RB-RD	5.91	2.30	2.30	3090
		<input checked="" type="checkbox"/> 2.25 m - RD	2.29	2.29	5.87	2290
	<input checked="" type="checkbox"/> 2.3 m - RBJA	5.91	2.66	2.66	4150	
支腿 Fixing angles Verankerungsfuss		R23P65	1.72	0.39	0.39	4×245

