

ZOOMLION

TELESCOPIC BOOM LIFTS

FOR SHIPYARD

ZT26S/ZT38S

Comply with ANSI/CSA/CE Standard



HIGHLIGHTS

- ▶ Perform dual capacity design, up to 300/454kg (660/1000lb), auto-switch by weighing system
- ▶ Full protection boom and towing chain system, wire rope built-in, no exposed pipeline, safe and reliable
- ▶ Chassis with extended axle, simple operation, long-term use without stagnation. (ZT38S)
- ▶ Standard 4WS, ideal for compact application (ZT38S)
- ▶ Fully sealed steel hood, good protection from pollution, bearing long lifespan
- ▶ Swing-out engine tray, easy to service
- ▶ standard three-stage fuel filtration and two-stage air filtration, adapt to heavy dust environments

FEATURES

Standard Features

Horn
Proportional control
All motion alarm
Flashing beacon
Self-closing entry gate
Emergency descent system
Emergency stop button
Anti-pinch guardrail
Auto-leveling system
On-board diagnostic system
Tilt protection system
Load sensing system
4.3' Led display
Swing-out engine tray
Anti-crushing device

Accessories & Options

- ▶ 4WD
- ▶ Platform light
- ▶ Head bumper



ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353692
E-mail: awp@zoomlion.com


Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
Web: www.zoomlion-access.com

ZOOMLION

Model	ZT26S		ZT38S	
	Metric	Imperial	Metric	Imperial
Size				
Work Height	27.6m	90ft 7in	39.6m	129ft 11in
Platform Height	25.6m	84ft	37.6m	123ft 4in
Horizontal Outreach	17.6m	57ft 9in	20.6m	67ft 7in
A - Stowed Length	12.6m	41ft 4in	13.9m	45ft 7in
B - Stowed Width	2.49m	8ft 2in	2.49m	8ft 2in
C - Stowed Height	2.75m	9ft	3.05m	10ft
D - Platform Length	1.5m	4ft 11in	1.5m	4ft 11in
E - Platform Width	0.8m	2ft 7in	0.8m	2ft 7in
F - Wheelbase	3.05m	10ft	3.7m	12ft 2in
Tread	2.49m	8ft 2in	3.6m	11ft 10in
G - Ground Clearance	0.42m	1ft 5in	0.43m	1ft 5in
Performance				
Platform Capacity (Unrestricted/Restricted)	300/454kg	660/1000lb	300/454kg	660/1000lb
Drive Speed (Stowed)	4.5km/h	2.8mph	4.5km/h	2.8mph
Gradeability	45% (24°)		45% (24°)	
Turning Radius (Inside)	4.4m	14ft 5in	3.8/4.3m	12ft 6in/14ft 1in
Turning Radius (Outside)	6.3m	20ft 8in	6.8/6.2m	22ft 4in/20ft 4in
Turntable Swing	360° continuous		360° continuous	
Platform Rotation	±90°		±90°	
Tail Swing	1.41m	4ft 7in	1.4m	4ft 7in
Max. Wind Speed	12.5m/s	28mph	12.5m/s	28mph
Power				
Engine	Weichai WP2.3(Stage IV) Kubota V3307(Stage III)		Weichai WP2.3 (Stage IV)	
Fuel Tank Capacity	150L	39.6 (us gal)	200L	52.8 (us gal)
Control Voltage				
Hydraulic Tank Capacity	150L	39.6 (us gal)	250L	52.8 (us gal)
Drive Mode	Option: 4WD		Option: 4WD	
Steering Mode	Front wheels		4WS/Front wheels/Crab	
Tire				
Type	Solid tire		Solid tire	
Weight				
Gross	17700kg	39021lb	21300kg	46958lb

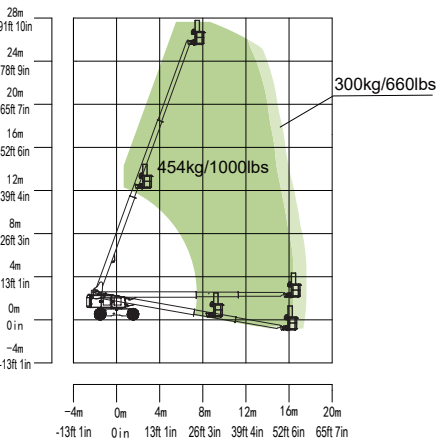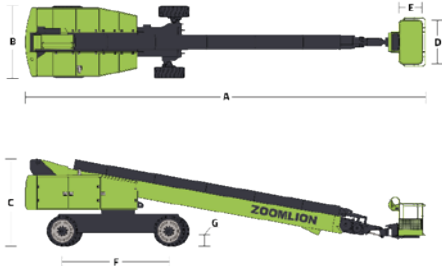

Range of Motion ZT26S

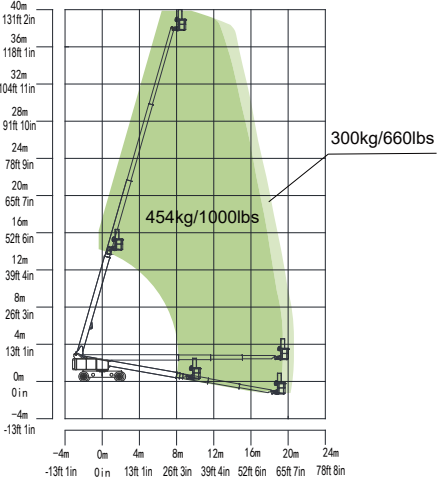

Range of Motion ZT38S

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification. Product specifications are updated to May, 2026.