

中联重科

ZT125 矿用自卸车

Mining Dump Truck

额定载重80 t

货厢容积45 m³ (平装)

53 m³ (堆装2:1)

发动机功率412 kW (560马力)



ZOOMLION

颜色组合已取得注册商标保护

产品简介

Product Introduction

承载结构优化的全熔透焊接式箱型截面车架、轻量化耐磨货厢、定制化高承载车桥和矿山专用变速箱，提高整车寿命和装载量。
Our product is equipped with a structurally optimized full penetration welded cross-section frame, a light and wear-resistant cargo compartment, customized high-load axles and gearboxes for mines, which can improve the lifespan and load capacity of the truck.

前悬架为五连杆非独立油气弹簧悬架，中后悬架为并装双轴五连杆非独立油气分离式平衡悬架，连杆轴承采用免维护关节轴承，承载可靠性、维修便利性和舒适性更好。

The front suspension is a five-link hydro pneumatic spring rigid axle suspension, the middle and rear suspension is a parallel-mounted two-axle five-link hydro pneumatic spring rigid axle balance suspension. The connecting rod bearing adopts maintenance-free joint bearings, which has better performance on carrying reliability, maintenance convenience and comfort.

驾驶舒适：全液压转向系统；司机座椅为可调减振座椅；驾驶室采用加厚钢板与橡塑海绵组成的复合式底板结构，隔音降噪；多媒体一体机具备收音机、蓝牙、GPS、倒车影像、USB 扩展功能。

Driving comfort: Full Hydraulic Steering System; Wide-body cab of mine; Adjustable damping driver seat; Composite floor structure composed of thickened steel plate and rubber sponge; Multimedia-one computer has the functions of radio, Bluetooth, GPS, reversing image and USB expansion.


维护便捷：免维护关节轴承、轴套；车辆前悬设计有踏步，方便工人检修。

Convenient maintenance: Maintenance-free oscillating bearing and shaft sleeve; The front suspension designed with pedal is more convenient maintenance.

整车尺寸参数

单位: mm

Vehicle Size Marking

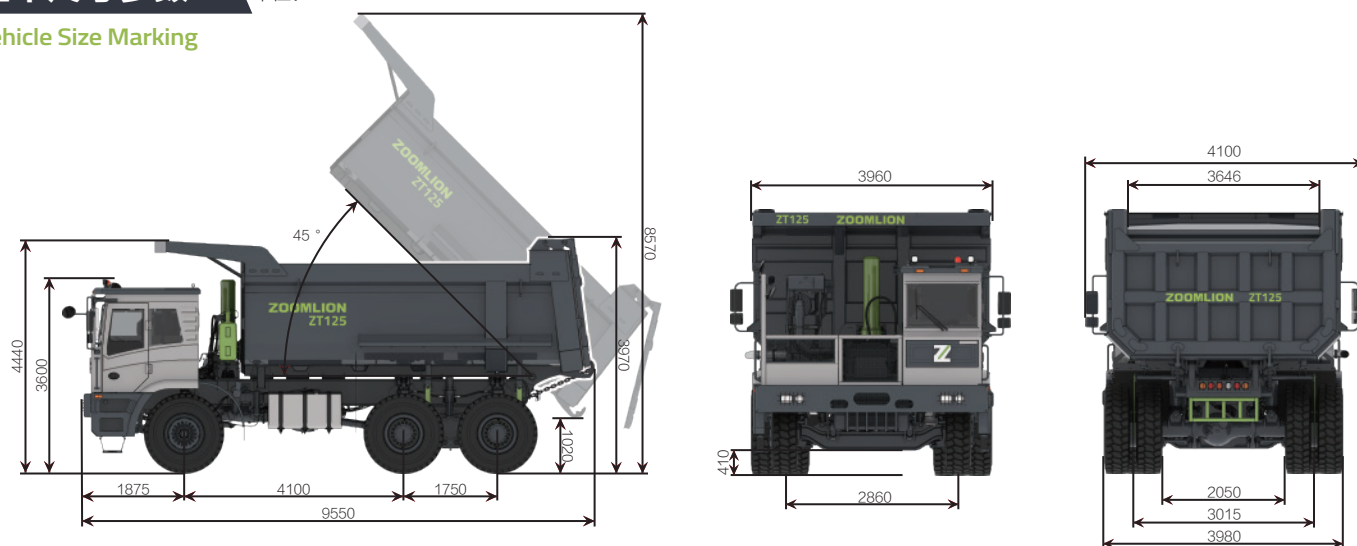

整车性能参数

Vehicle Performance Marking

主要参数 Main Parameters	单位 Unit	数值 Value	主要参数 Main Parameters	单位 Unit	数值 Value
整备质量 Curb Weight	kg	34000	最大扭矩 Max. Torque	N.m/rpm	2500/(1100-1500)
额定载质量 Rated Payload	kg	80000	变速箱型号 Gearbox Model	/	FAST 8DS260
最高车速 Max. Speed	km/h	42	轴荷 Load of Axle	t	35+45+45
最大爬坡度 Max. Gradeability	%	29	转向系统 Steering System	/	全液压动力转向
发动机型号 Engine Model	/	YC6K560-GT30	辅助制动 Brake	/	缸内制动+液力缓行
排放标准 Emission Standards	/	国三	标准斗容 Standard Body Capacity	m³	45 (平装) 53 (堆装2:1)
发动机排量 Engine Capacity	L	12.939	轮胎 Tires	/	16.00R25
额定功率 Rated Power	kW/rpm	412/1900			

资料和技术参数如有更改，恕不另行通知。
图中所示的机器可能包括附加设备。

ZOOMLION

中联重科股份有限公司

地址：长沙市望城经济开发区中联重科望城工业园
服务热线：4008000157 0731-88059233

