

ZOOMLION

CRAWLER TELESCOPIC BOOM LIFT

ZT14JC



HIGHLIGHTS

- ▶ 250kg/350kg dual-rated capacity, freely selectable for optimized heavy-load or extended-reach operations.
- ▶ Integrated tracked chassis with low ground pressure delivers exceptional stability in harsh environments.
- ▶ Euro V emission compliance ensures eco-friendly operation.
- ▶ Simplified structure and refined design achieve overall weight reduction.
- ▶ Three-hinge-point luffing mechanism ensures smooth boom articulation.
- ▶ Seamless platform leveling and responsive chassis steering.
- ▶ Load-sensing hydraulic system enables precise control with reduced energy consumption.
- ▶ Compact design with folding jib facilitates transport via recovery trucks/containers.

FEATURES

Standard Features

Remote communication system
Horn
Proportional control
All motion alarm
Flashing beacon
Self-closing entry gate
Emergency descent system
Emergency stop button
Auto-leveling system
On-board diagnostic system
Tilt protection system
Oscillating axle
4.3' Led display
Swing-out engine tray
Remote monitoring and rental management platform
Anti-crushing device
Remote upgrade controller
Steel track

Accessories & Options

- ▶ Platform work light
- ▶ Anti-collision device
- ▶ AC power to platform
- ▶ Rubber track pad



ACCESS WITH ZOOMLION GREEN

Phone: 0086(731)-88353692
E-mail: awp@zoomlion.com

Add: 701 Xulong Nan Lu, Xiangjiang New District, Changsha Hunan, China
Web: www.zoomlion-access.com

ZOOMLION

Model	ZT14JC	
	Metric	Imperial
Size		
Work Height	16.5m	54ft 2in
Platform Height	14.5m	47ft 7in
Horizontal Outreach	12.7m	41ft 8in
A - Stowed Length	9.7m	31ft 10in
B - Stowed Width	2.25m	7ft 5in
C - Stowed Height	2.52m	8ft 3in
D - Platform Length	2.44m	8ft
E - Platform Width	0.91m	3ft
F - Wheelbase	2.50m	8ft 2.5in
Wheelspan	2.25m	7ft 5in
G - Ground Clearance	0.36m	1ft 2in
H Crawler width	0.4m	1ft 4in
Performance		
Platform Capacity (Unrestricted/Restricted)	250kg/350kg	550lb/770lb
Operator (Unrestricted/Restricted)	2/2	
Drive Speed (Stowed)	2.0km/h	1.24mph
Turning Radius	2.02m	6ft 7.5in
Tail Swing	0.91m	2ft 12in
Gradeability	45% (24°)	
Turntable Swing	360°	
Platform Rotation	±90°	
Jib Rotation	-55°~75°	
Work slope	5°	
Max. Wind Speed	12.5m/s	28mph
Power		
Engine	Kubota V2403 (Euro V)	
Fuel Tank Capacity	150L	39.6gal
Hydraulic Tank Capacity	90L	23.8gal
Control Voltage	12v Dc	
Traveling Machenism	Steel Track + Rubber Track Pad	
Ground Pressure	78kPa	11.3psi
Weight		
Gross	9820kg	21649lb

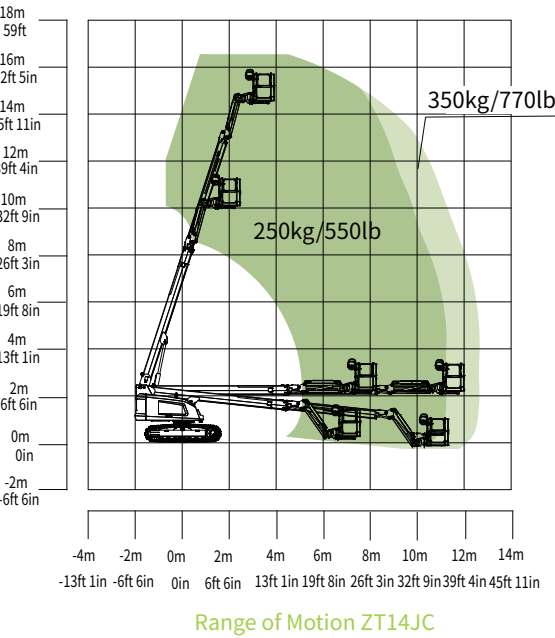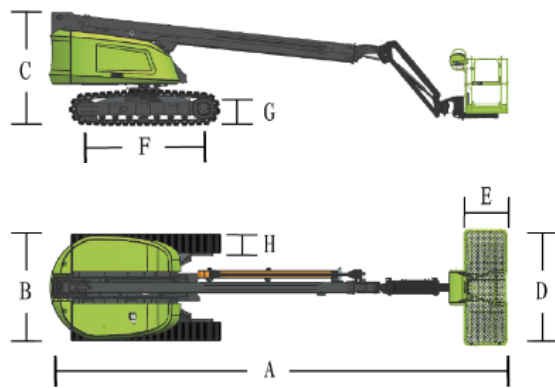

ZOOMLION ACCESS reserves the right to make specification and/or equipment changes without prior notification.
Product specifications are updated to May, 2026.